

316 Stainless Steel Recessed Eyelid/Step Lights



- Recessed wall/step light with eyelid
- Stainless steel 316 marine grade
- Tempered glass
- Installation depth needed: 125mm
- **NOTE: adequate drainage must be allowed**
- IP rating: IP65

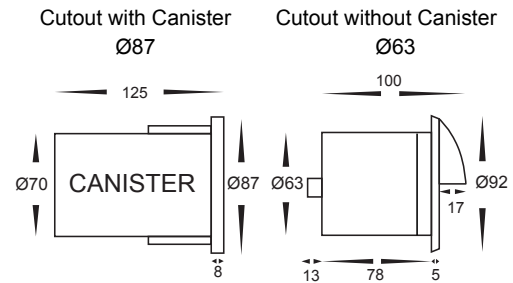




IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV19012C-SS316	Cool white, 6000k	300lm	12v DC LED 5w	5w MR16 LED globe
	HV19012W-SS316	Warm white, 3000k	250lm	12v DC LED 5w	5w MR16 LED globe
	HV19032C-SS316	Cool white, 6000k	300lm	240v LED 5w	5w GU10 LED globe
	HV19032W-SS316	Warm white, 3000k	250lm	240v LED 5w	5w GU10 LED globe

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)