




# Integral Design Tiltable Downlight

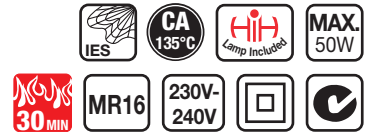

## ENGINEERED FOR FIRE SAFETY FOR YOUR PEACE OF MIND

- 40° angular adjustment and fully rotatable
- Thermal cut-off protection with auto reset function. Guards against installation faults or overlampping
- 30 minute fire rating
- Designed for H1, high 'R' value batt installations
- Quick and economical installation - only one connection - large looping mains terminals
- Integrated downlight for safer placement of transformer and supply wires.
- Dimmable
- Can be butted up to non flammable insulation (eg fibreglass)
- Acoustic rating: for acoustic STC55 Ceilings space 1.6m minimum. For acoustic (RW) STC57 and 58, space 2.5m minimum.
- Input capacitance 100 nano farrods
- Cos  $\Phi$  = 0.98 (NSW 21045)
- Superlux recommend use of trailing edge dimmers.
- **HiH ( High Intensity Halogen) lamp included, 30% power saving 35W = 50W of illuminance**
- 5 year transformer warranty

### Your choice of colour trims

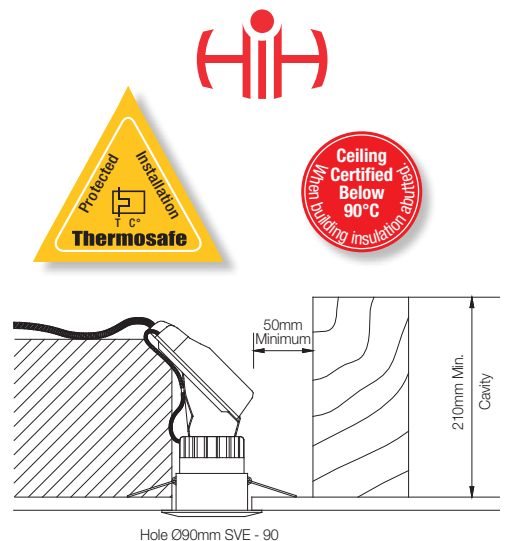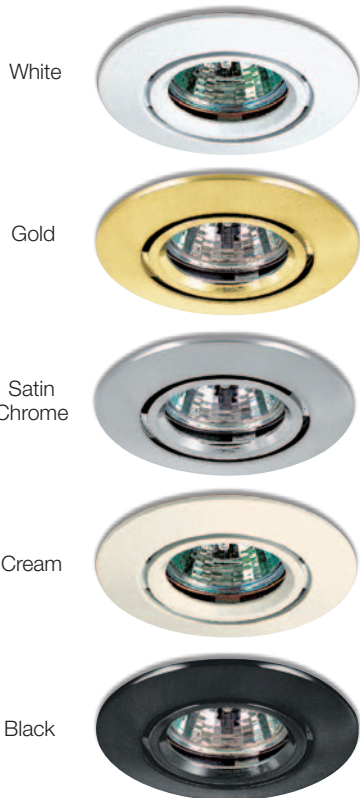

ECG must not be installed on a circuit with inductive loads