



Closed R80 Reflector Downlight



Economy 100w enclosed downlight for reflector lamps

- **Thermal cut-off and auto reset function for protection against misuse and overloading.**
- Lampholders can be prewired before assembly
- Designed for quicker installation
- Ceiling hole 105mm diameter
- Double insulated, no earth required
- Draft proof enclosed construction
- Suits a wide range of ceiling thicknesses
- Long life ceramic lamp holder
- Manufactured to AS/NZS60598 electrical standards
- **Acoustic rating**
 STC55 ceiling = Min. spacing of 1.6M
 STC57 and 58 = Min. spacing of 2.5M

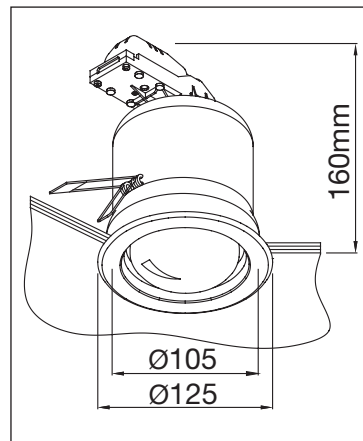

Photometrics	To Desk 1.5M	To Floor 2.4M
R80-100W <i>80 Beam Mood Lighting</i>	210 Lux 2.5 Dia	36 Lux 4.2 Dia
R80-100W <i>25 Beam Task Lighting</i>	890 Lux 0.7 Dia	320 Lux 1.1 Dia