

# LED Rigid Strip




**CV** 12V DC

- 300L x 5.5H x 9mmW
- 12 Diodes per length
- Directly linkable
- 12volt DC 0.8watts
- Plug into DC power supply using SLED-FEED (see below) or 12volt battery
- 65 Lux at 300mm
- Supplied with 2x Stainless Steel mounting clips
- White 4100k



Close up showing Connecting ends and discreet mounting clips

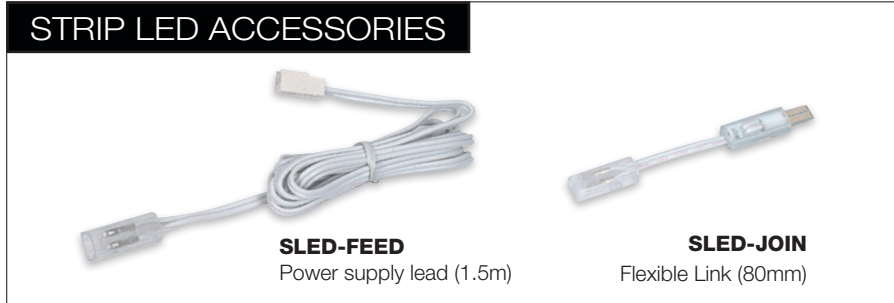


**CV** 12V DC

**SLED-EC15**

- 121L x 45W x 20mmH Min hole Ø 50mm
- Light Emitting diode (LED) power supply
- Secondary 12volts direct current
- 1-15watts

**SLED-EC5**

- 89L x 45W x 23mmH Min hole Ø 50mm
- Light Emitting diode (LED) power supply
- Secondary 12volts direct current
- 0.5 - 5watts

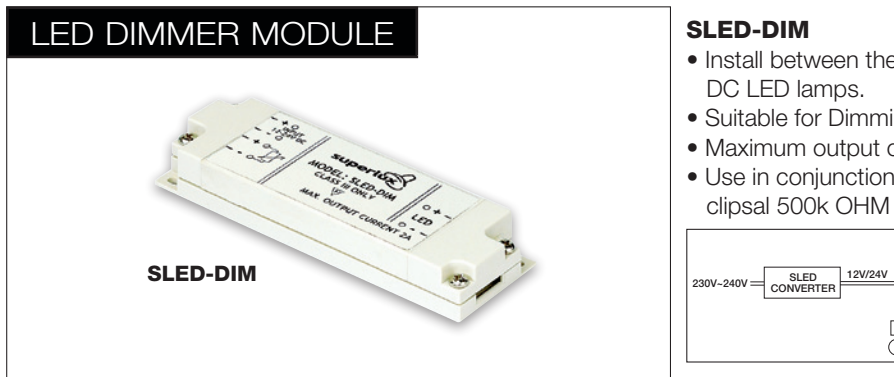

**SLED-DIM**

- Install between the ELV DC power supply and the Superlux DC LED lamps.
- Suitable for Dimming constant voltage 12/24V DC LED lighting.
- Maximum output current 2A.
- Use in conjunction with a potentiometer such as clipsal 500k OHM (30 POTFM)

