





- Recessed Luminaires LED Downlight
- High efficiency facets aluminium reflectors
- Wide Beam Angle
- Polycarbonate diffuser lens
- Die-cast aluminum mounting ring, with system to fix it to the false ceiling using steel springs
- Die-cast heat sink with passive cooling
- Luminaires are equipped with electronic driver



□ White

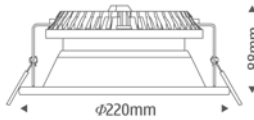

□ ϕ 205 mm (Cut out)

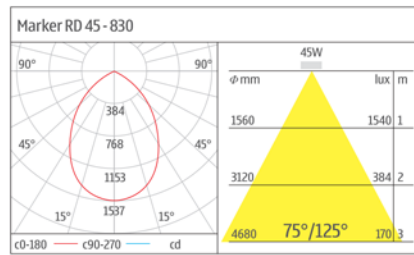

Order No.	Marker RD 45 - 840	Marker RD 45 - 850
Power(W)	45	45
Voltage(V)	110-240	110-240
DC(mA)	1400	1400
CCT(K)	4000	5000
CRI	75	75
Beam Angle(°)	75/125	75/125
Hot Lumen(Lm)	2830	2910
Power Factor	>0.95	>0.95
Rated Life(°C)	-30~40	-30~40
Weight(Kg)	1.1	1.1
CTN(PCS)	8	8

Driver included : DR45N.1400mA+LP