

AT9023 Tri

7W LED Tri-colour downlight with dimmable driver

Features

- 90 Degree Beam angle
- Supplied with Dimmable LED Driver
- Ideal for Residential, retail, showroom and decorative



ORDERING INFORMATION

Order code	14903
Description	7W LED Downlight with Dimmable Driver - 90o beam - Black - TRI
Driver Type	Dimmable (Phase cut)
Item Code	AT9023/BLK/TRI

MECHANICAL

Adjustability	Fixed
Body Material	Aluminium
Diffuser Material	PMMA
Product Finish	Powdercoated
Fitting Colour	Black
IC Rating	IC-4

IC-4 rating has been conducted at the products maximum working Temperature Range (C) in line with Australian standards. This provides the required safety when covered with insulation and used in Australian Environments.

Installation Type	Recessed
IP Rating	IP54 Front Face Only

ELECTRICAL

Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

Switch Type	Inline
Working Temp Range	0 to 40 °C

LAMP

Beam Angle	90 °
CCT Configuration	TRI-CCT
CRI	>90
LED Type	Diffused
Maximum Bulb Wattage	7 W
Number of Lamps	1

COLOUR TEMPERATURE

7 Watts

Warm White (3000 K)	540 lm
Cool White (4000 K)	620 lm
DayLight (5700 K)	590 lm

DRIVER

Dimmable	Yes
Driver Included	Yes
Integrated Driver	No
Driver Type	Dimmable (Phase cut)
Wiring Type	Re-wireable Flex & Plug (2 pin)

COMPLIANCE

Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15
------------------	--

WARRANTY

Commercial Use Warranty	3 RTB (Total 3 Years)
Domestic Use Warranty	3 (Yr) RTB
VIP Warranty	2 Onsite, 3 RTB (Total 5 Years)


VIP warranty is available to registered users and is subjected to additional terms and conditions.

DIMENSIONS

Cutout	70 mm
Product Diameter	85 mm
Product Height	40 mm
Product Width	85 mm


LINE DRAWINGS

AT9023/TRI

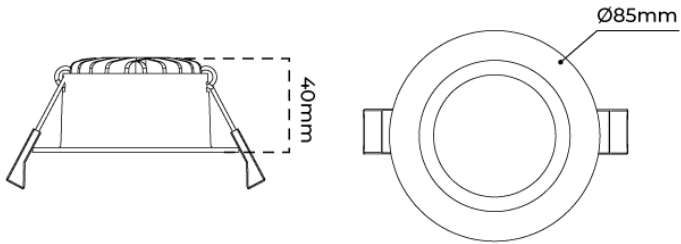


PHOTOMETRICS

AT9023/9W/TRI/5700K

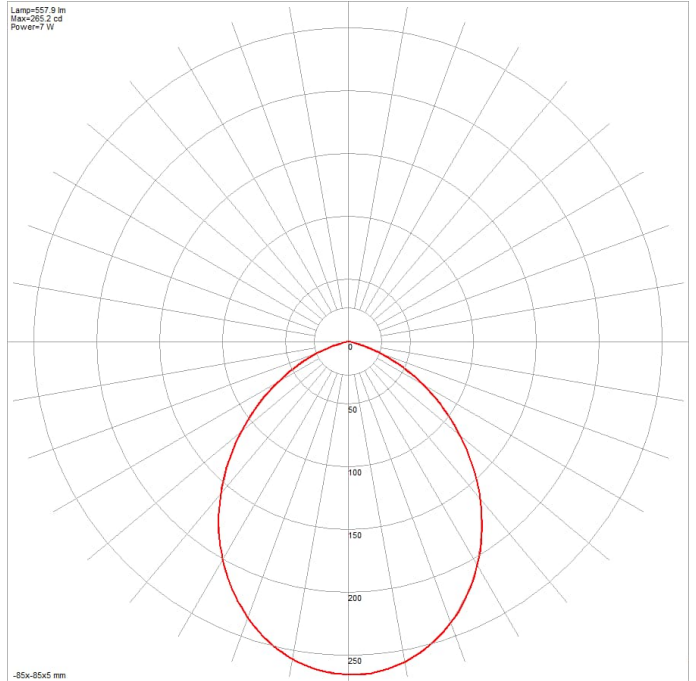

AT9023/9W/TRI/4000K

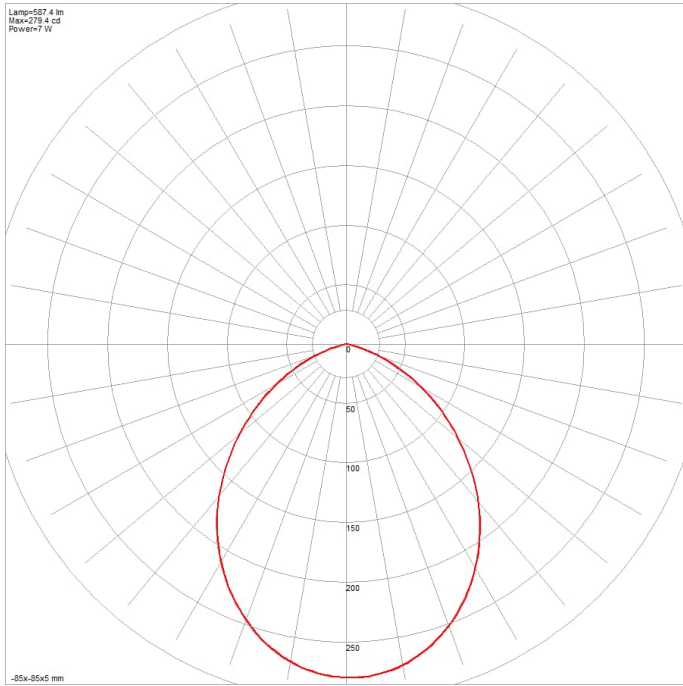

AT9023/9W/TRI/3000K

