
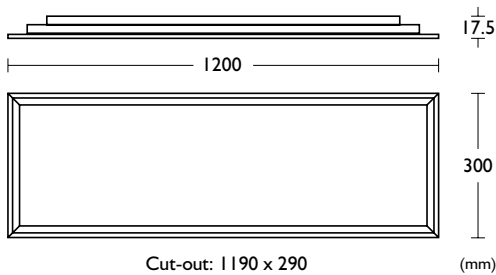


Slimline Recessed Ceiling Panel Kit

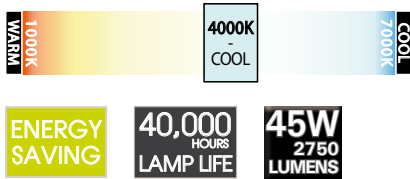

SPI200ECO

WEIGHT / LIFE	
Panel	4Kg
LED Lamp Life	40,000HR
Controller Life	40,000HR

PRODUCT SPECIFICATIONS

ELECTRICAL	
Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.25A
Power Factor	0.9
Total Input Power	45W
Secondary Output Voltage	40V DC
Secondary Output Current	1A
Lamp Power	42W

MATERIALS	
Heatsink	Aluminium
Attachment Clip	Steel
Body	Aluminium, PMMA
Diffuser	PMMA
Controller Base & Cover	Polycarbonate

THERMAL	
Thermal Protection	Fully protected
Ambient Temperature Rating	50°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP20

OPTICAL / PHOTOMETRIC	
Luminous Flux	2750 lumens
CRI	67
Colour Temperature	4000K
Beam Angle	150°

PRODUCT FEATURES

- 45W Slimline Recessed Ceiling Panel Kit
- Die-cast aluminium body and base
- Frosted finish PMMA thermoplastic diffuser
- Steel clips
- 40V, 1A plug in LED driver with lamp lead and secondary lead with 1.5m flex & plug



REFERENCE	COLOUR	CODE
SPI200ECO	White	27066

Panel & Oysters