



Flinders - LED Exterior Ceiling Mounted Downlight



EX2235N

Ø90 (mm)

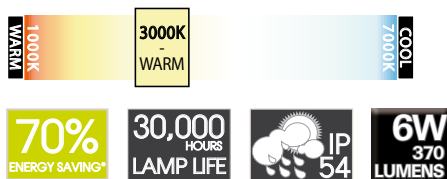

WEIGHT / LIFE

Fitting	750g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT FEATURES

- 6W LED exterior ceiling mounted downlight
- Powder coated die-cast aluminium cylindrical body
- Tempered clear glass diffuser
- Silicon rubber gasket
- Inbuilt driver for direct connection to 240V supply
- 6 x 1W LED's

* Compared to a standard 18W GU10 CFL lamp



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.07A
Power Factor	0.6
Total Input Power	7.7W
Secondary Output Voltage	24V
Lamp Power	6 x 1W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	370 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	10°



REFERENCE	COLOUR	CODE
EX2235N	Graphite	27046