


Raleigh - LED Exterior Up/Down Wall Light



EX2621

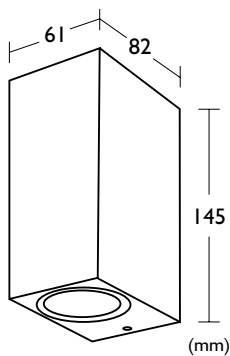

WEIGHT / LIFE

Fitting	770g
LED Lamp Life	30,000 HR
Controller Life	30,000 HR

PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.091A
Power Factor	0.6
Total Input Power	10.8W
Secondary Output Voltage	42V
Lamp Power	2 x 5W

MATERIALS

Body	Aluminium
Diffuser	Glass

THERMAL

Thermal Protection	135°C, fully protected
Ambient Temperature Rating	40°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP54

OPTICAL / PHOTOMETRIC

Luminous Flux	317 lumens
CRI	75-80
Colour Temperature	3000K
Beam Angle	56°

PRODUCT FEATURES

- 10W LED exterior up/down wall light
- Powder coated die-cast aluminium rectangular body
- Clear glass diffusers
- Silicon rubber gasket
- Weather resistant IP54
- Inbuilt driver for direct connection to 240V supply
- 1 x 5W LED in each diffuser

* Compared to a standard 7W GU10 CFL lamp



REFERENCE	COLOUR	CODE
EX2621	Graphite	27037

Exterior /
Landscape