


# LYNX-CFL / 4-PIN



- Particularly suitable for use in the new generation of ultra compact fluorescent downlights and luminaires
- Excellent colour rendering – Ra85/Class 1B
- Can be operated on electro-magnetic and electronic ballasts
- Suitable for emergency lighting
- Suitable for dimming applications on approved dimmable electronic ballast
- Lamp should be initially operated at full power for 100 hours prior to any dimming of lamp
- Average rated life: 10000 hours

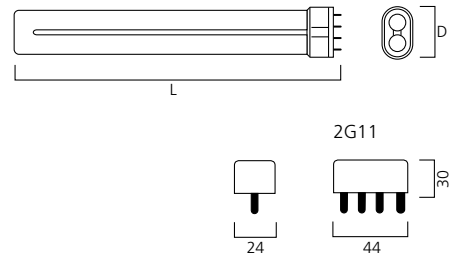

2G11	18W	24W	36W
L	225	320	415
D	38	38	38

## LYNX-CFL / 4-PIN

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Average Rated Life	Packing Qty
<b>Lynx-CFL - Warmwhite (830 - 3000K)</b>							
252330	Lynx-CFL/18W/830	18W	2G11	3000K	1200 lm	10000 hrs	10
252350	Lynx-CFL/24W/830	24W	2G11	3000K	1800 lm	10000 hrs	10
252370	Lynx-CFL/36W/830	36W	2G11	3000K	2900 lm	10000 hrs	10
<b>Lynx-CFL - Coolwhite (840 - 4000K)</b>							
252018	Lynx-CFL/18W/840	18W	2G11	4000K	1200 lm	10000 hrs	10
252360	Lynx-CFL/24W/840	24W	2G11	4000K	1800 lm	10000 hrs	10
252019	Lynx-CFL/36W/840	36W	2G11	4000K	2900 lm	10000 hrs	10