


# XL-LED Performance Exterior Bunker / Wall Light



XL-LED PERFORMANCE

Exterior /  
Landscape

## PRODUCT SPECIFICATIONS

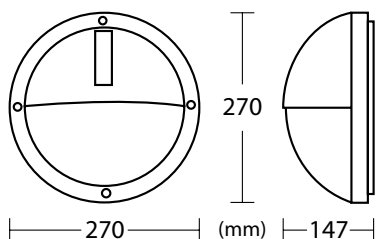

XL-EX649



ELECTRICAL	
Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.15A
Power Factor	0.9
Total Input Power	22W
Secondary Output Voltage	24V DC
Secondary Output Current	0.7A
Lamp Power	20W
MATERIALS	
Body	Dry powder coated die-cast aluminium
Diffuser	UV stabilised polycarbonate
Controller Base & Cover	Thermoplastic
THERMAL	
Thermal Protection	Fully protected
Ingress Protection Rating	IP65
OPTICAL / PHOTOMETRIC	
Luminous Flux	1100 lumens
CRI	80
Colour Temperature	3000K
WEIGHT / LIFE	
Fitting	2.35Kg
LED Lamp Life	50,000HR

## PRODUCT FEATURES

- XL-LED Performance Bunker / Wall Light
- Matt finish dry powder coated die-cast aluminium base with heat sink
- UV stabilized opal polycarbonate diffuser
- 20W integral LED module
- Dimmable with most trailing edge dimmers



REFERENCE	COLOUR	CODE
XL-EX649W	White	26849
XL-EX649G	Graphite	26850