


XL-LED PERFORMANCE SURFACE MOUNTED DOWNLIGHT KIT

- EX3880


iP
iReady

DOWNLIGHTS

XL-LED PERFORMANCE



SAVE ENERGY
LAMP LIFE 50,000

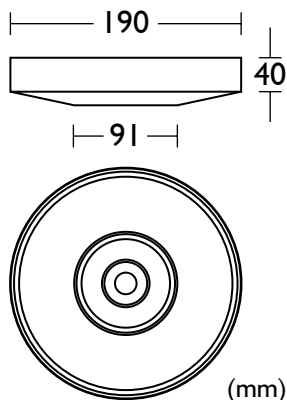

DL3880



PRODUCT SPECIFICATIONS

ELECTRICAL

Supply Voltage	230-240Vac
Supply Frequency	50-60Hz
Supply Current	0.15A maximum
Power Factor	0.53
Total Input Power	15W
Secondary Output Voltage	44V DC maximum
Secondary Output Current	0.35A
Lamp Power	14W

MATERIALS

Heatsink	Aluminium
Body	Aluminium

THERMAL

Thermal Protection	Fully protected
Ambient Temperature Rating	45°
Maximum Surface Temp	75°
Ingress Protection Rating	IP20

OPTICAL / PHOTOMETRIC

Luminous Flux	1200 lumens
CRI	80
Colour Temperature	3000K
Beam Angle	50°

DIMENSIONS / WEIGHT / LIFE

Downlight	750g
Controller	115(W)x34(D)x19(H) mm, 150g
LED Lamp Life	50,000 HR
Controller Life	50,000 HR

PRODUCT FEATURES

- 14W LED surface mounted downlight kit
- Matt white powder coated die cast aluminium body
- White painted base
- Inbuilt LED driver
- Includes 1 x 14W LED module



REFERENCE	COLOUR	CODE
DL3880	White	27035