

BOOST-13 LED Downlight



Description

The BOOST range of LED downlights has been specifically designed by incorporating cost saving materials to produce a cost effective and well performing downlight solution to the market. Bright output 13W LED recessed downlight with anti-glare deep set frame, opal diffuser, dimmable LED driver flex & plug. Fully dimmable with Domus dimmer.

The BOOST series offers the customer a range of performance features including a unique thermal management system not offered by others.


Specification Features

Input Voltage:	240V AC
Power (W):	13W
IP rating (IP):	44*
Lumens (lm):	Warm White 3000K - 900lm Neutral White 4000K - 930lm White 5000K - 970lm
LED type:	SMD
CCT:	3000K - 4000K - 5000K
CRI:	≥83
Beam angle (°):	90°
Dimmable:	Yes**
Lifespan (hrs):	40,000hrs
Cutout (Ø):	Ø90mm

* IP44 rating is from the underside of the down light once installed into the ceiling.

** Tested on the Domus dimmer series. May work on others but not tested.

Diagrams / Additional

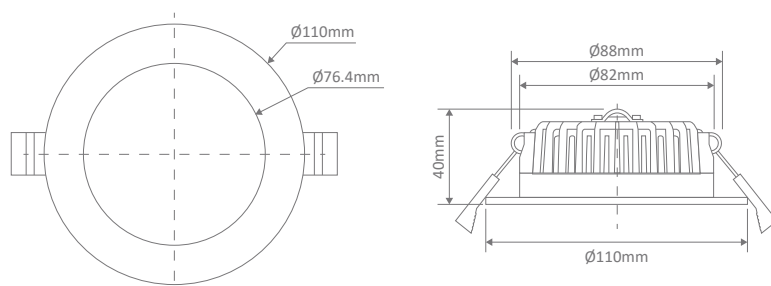

Order Code: 20720
Product Code: BOOST-13-RND-W-WW
Colour: Satin White Trim - Warm White 3000K

Order Code: 20721
Product Code: BOOST-13-RND-W-NW
Colour: Satin White Trim - Neutral White 4000K

Order Code: 20722
Product Code: BOOST-13-RND-W-W
Colour: Satin White Trim - White 5000K

Order Code: 20723
Product Code: BOOST-13-RND-S-WW
Colour: Silver Trim - Warm White 3000K

Order Code: 20724
Product Code: BOOST-13-RND-S-NW
Colour: Silver Trim - Neutral White 4000K

Order Code: 20725
Product Code: BOOST-13-RND-S-W
Colour: Silver Trim - White 5000K



Recessed Luminaire where fixed building insulation material can abut and cover the recessed luminaire. Building Insulation does not have to be non flammable. Building Insulation must maintain structural integrity at 90 degrees C.
Important: IC-F Downlights are not to be used in the Fire Rated Applications.