


EVME-R-W



Order Code: **19974**

Product Code: **EVME-R-W**

Colour: **White** 6400K

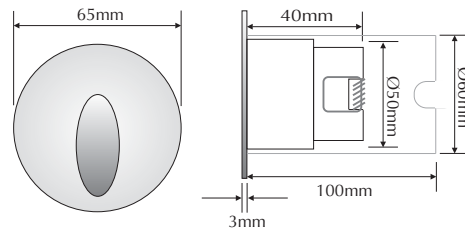

Description: A smart and contemporary semi-recessed wall light designed for low level floor/path lighting.

Data: Round fascia, machined pure aluminium, natural anodised finish, high power Cree LED, 3W total output, 210lm output, 30° beam spread, IP65 rated, recessed aluminium heat sink with mounting clips for plaster board application or a polycarbonate housing for concrete/brick work, 700mA Constant Current.

Fitting Size: Front face: (Ø) 65mm
 Recessed heat sink: (Ø) 50mm x (D) 40mm

Cutout Size: Plaster board (Ø) 53mm
 Concrete using housing (Ø) 60mm

Additional: The above wall light is non dimmable. To dim the wall light please refer to the dimmable Constant Current drivers in the power supply section.



Domus Lighting


29-31 Richland Street Kingsgrove NSW 2208

Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | Email: sales@domuslighting.com

EV-ME-R-WW



Order Code: **19975**
 Product Code: **EV-ME-R-WW**
 Colour: **Warm White** 3200K

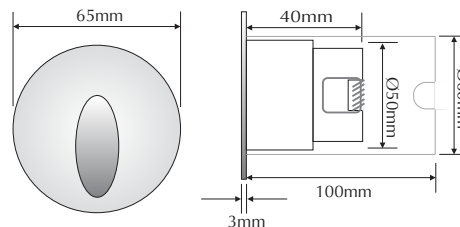

Description: A smart and contemporary semi-recessed wall light designed for low level floor/path lighting.

Data: Round fascia, machined pure aluminium, natural anodised finish, high power Cree LED, 3W total output, 169lm output, 30° beam spread, IP65 rated, recessed aluminium heat sink with mounting clips for plaster board application or a polycarbonate housing for concrete/brick work, 700mA Constant Current.

Fitting Size: Front face: (Ø) 65mm
 Recessed heat sink: (Ø) 50mm x (D) 40mm

Cutout Size: Plaster board (Ø) 53mm
 Concrete using housing (Ø) 60mm

Additional: The above wall light is non dimmable. To dim the wall light please refer to the dimmable Constant Current drivers in the power supply section.



Domus Lighting

29-31 Richland Street Kingsgrove NSW 2208

Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | Email: sales@domuslighting.com