


# EVMODULA-S-W

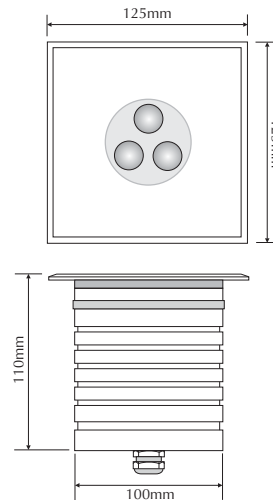

Order Code: **19423**

Product Code: **EVMODULA-S-W**

Colour: **White**  6500K

Description: The MODULA inground luminaire has been architecturally designed for many areas where reliability is crucial and cosmetics is a must. With its 6063 grade machined aluminium anodised face and body, to the clear glass lens the MODULAS performance is unsurpassed.

Data: The MODULA recessed inground uplighter is made from the highest quality 6063 grade aluminium, natural anodised square trim cover, black anodised body, 316 stainless fixings, White 6500K, 3 x 3W Cree LED, 12V DC, 390 lumens, clear lens, 45° beam angle, Constant Current to Constant Voltage converter, polycarbonate housing. IP67 rated.

Size: Front face: 125mm  
Overall height: 110mm

Options: This fitting requires a Constant Voltage DC driver located in the power supply section of this catalogue. The MODULA may be dimmed via 1-10V DC with the correct controller located in the Controller section of this catalogue.


Cree LED	Anodised finish	390 lumens	White 6500K	45° beam angle	12V DC Constant Voltage	IP67 rated	9W total output
Machined 6063 grade aluminium							

**Domus Lighting**

29-31 Richland Street Kingsgrove NSW 2208

Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | Email: sales@domuslighting.com

# EVMODULA-S-WW

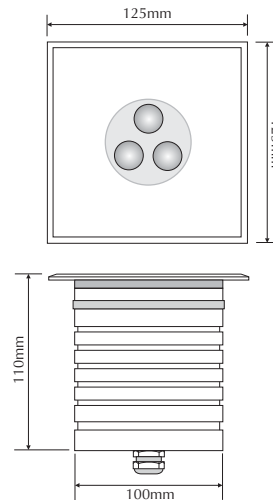

Order Code: **19422**

Product Code: **EVMODULA-S-WW**

Colour: **Warm White**  2700K

Description: The MODULA inground luminaire has been architecturally designed for many areas where reliability is crucial and cosmetics is a must. With its 6063 grade machined aluminium anodised face and body, to the clear glass lens the MODULAS performance is unsurpassed.

Data: The MODULA recessed inground uplighter is made from the highest quality 6063 grade aluminium, natural anodised square trim cover, black anodised body, 316 stainless fixings, Warm White 2700K, 3 x 3W Cree LED, 12V DC, 390 lumens, clear lens, 45° beam angle, Constant Current to Constant Voltage converter, polycarbonate housing. IP67 rated.

Size: Front face: 125mm  
Overall height: 110mm

Options: This fitting requires a Constant Voltage DC driver located in the power supply section of this catalogue. The MODULA may be dimmed via 1-10V DC with the correct controller located in the Controller section of this catalogue.

Cree LED	Anodised finish	390 lumens	Warm White 2700K	45° beam angle	12V DC Constant Voltage	IP67 rated	9W total output
Machined 6063 grade aluminium							

**Domus Lighting**

29-31 Richland Street Kingsgrove NSW 2208

Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | Email: sales@domuslighting.com