



Aluminium Bollard Lights



825

HV1601/2-TTM
+
HV1603-TTM

- High light bollard
- Titanium coloured aluminium body
- High grade perspex reflector lens
- 2m reinforced cable
- Twin cable gland
- 445mm height
- Raised lamp height to maximise light output
- 240v GU10 6w max / 12v MR16 6w max
- IP rating: IP54

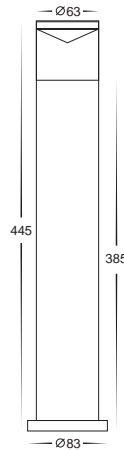

Titanium Coloured Aluminium Bollard Lights *Suitable for use with LED globes only*

IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV1601C-TTM	Cool white, 6000k	300lm	240v GU10 5w	5w LED globe
	HV1601W-TTM	Warm white, 3000k	250lm	240v GU10 5w	5w LED globe
	HV1602C-TTM	Cool white, 6000k	300lm	12v MR16 5w	5w LED globe
	HV1602W-TTM	Warm white, 3000k	250lm	12v MR16 5w	5w LED globe

All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (169 - 178)

All low voltage products that specify LED or are supplied with a 12v LED globe must be used with a suitable LED driver, refer to pages (188 - 192)

	HV1603-TTM	
	<ul style="list-style-type: none"> • High light bollard extension • Coloured titanium aluminium body • 380mm total extension height • Can be used to extend HV1601-TTM or HV1602-TTM • IP rating: As per fitting used • Up to 2 extensions can be used 	

	HV1607	
	<ul style="list-style-type: none"> • Bollard spike • High grade stainless steel • 400mm Length • Includes stainless steel base plate • To suit HV1601/2 range and HV1605 & HV1606 	