


In-ground Uplighters Square



- In-ground uplighter square
- Stainless steel 316 marine grade cover
- Flush tempered glass
- Trafficable to 600kg
- Cut out not using plastic canister: 100mm
- Cut out using plastic canister: 110mm
- Face: 120mm x 120mm
- Installation depth: 155mm
- **NOTE: adequate drainage must be allowed**
- 240v GU10 35w max / 12v MR16 20w max
- IP rating: IP65
- Can be used with a halogen globe

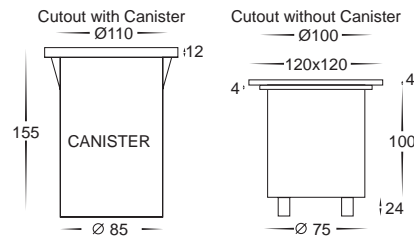

316 Stainless Steel Face In-ground Uplighters Square

IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV1701C	Cool white, 6000k	300lm	12v LED 5w	5w LED globe
	HV1701W	Warm white, 3000k	250lm	12v LED 5w	5w LED globe
	HV1706C	Cool white, 6000k	300lm	240v LED 5w	5w LED globe
	HV1706W	Warm white, 3000k	250lm	240v LED 5w	5w LED globe

All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (169 - 178)

All low voltage products that specify LED or are supplied with a 12v LED globe must be used with a suitable LED driver, refer to pages (188 - 192)