


# 7w LED In-ground Uplighters Round





- In-ground uplighter round
- Stainless steel 316 marine grade cover
- Beam angle: 120°
- Flush tempered glass
- Trafficable to 1000kg
- Cut out not using plastic canister: 85mm
- Cut out using plastic canister: 90mm
- Face diameter: 100mm
- Installation depth: 145mm
- **NOTE: adequate drainage must be allowed**
- IP Rating: IP67

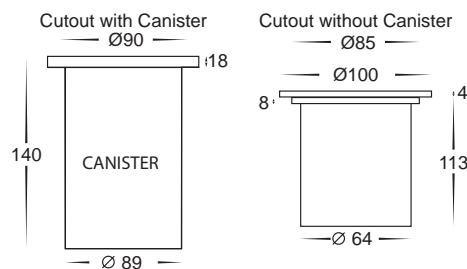

*Optional face with screws.  
Sold separately*

## 316 Stainless Steel Face In-ground Uplighters Round

IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	<b>HV1831W-240V</b>	Warm white, 3000k	560lm	240v LED 7w	Built in COB 7w LED
	<b>HV1831W-12V</b>	Warm white, 3000k	560lm	12v LED 7w	Built in COB 7w LED

All low voltage products that specify LED or are supplied with a 12v LED globe must be used with a suitable LED driver, refer to pages (188 - 192)