



Image for illustration purposes only.

All LED strip must be installed on an aluminium heat dissipating surface



Image for illustration purposes only.

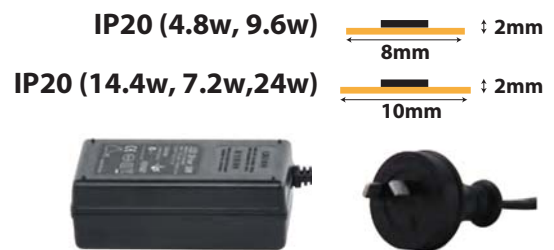
All LED strip must be installed on an aluminium heat dissipating surface



All low voltage products that specify LED or are supplied with a 12v LED globe must be used with a suitable LED driver, refer to pages (188 - 192)

Warm White LED Strip Kits

- Viper LED flexible strip light
- Dimmable using Havit LED controllers
- Peel and stick backing for initial placement
- Cuttable every 50mm for 60 LED per mtr
- Cuttable every 100mm for 30 LED per mtr
- Max 4m Length
- Beam angle 120 degrees
- All LED strip must be installed using anti-static measures and on an aluminium heat dissipating surface for warranty purposes (HV9705 or HV9705-DBL)







Cool White LED Strip Kits

- Viper LED flexible strip light kits
- Cool white, 430-1290lm per 1m
- Dimmable using Havit LED controllers
- Peel and stick backing for initial placement
- Cuttable every 50mm for 60 LED per mtr
- Beam angle 120 degrees
- All LED strip must be installed using anti-static measures and on an aluminium heat dissipating surface for warranty purposes (HV9705 or HV9705-DBL)







VIPER Kits

Warm White LED Strip Lighting Kits

IMAGE	LENGTH	PART NUMBER	SMD	IP RATING	COLOUR TEMP	OUTPUT	POWER	DIMMABLE
	2 mtr	VPR9733IP54-60-2M	3528	IP54 WATER RESISTANT	Warm white, 3000k	780lm 120 LED	12v 4.8w per 1m	Using Havit LED Controllers
	5 mtr	VPR9733IP54-60-5M	3528	IP54 WATER RESISTANT	Warm white, 3000k	1950lm 300 LED	12v 4.8w per 1m	Using Havit LED Controllers
	2 mtr	VPR9763IP54-60-2M	5050	IP54 WATER RESISTANT	Warm white, 3000k	2340lm 120 LED	12v 14.4w per 1m	Using Havit LED Controllers
	5 mtr	VPR9763IP54-60-5M	5050	IP54 WATER RESISTANT	Warm white, 3000k	5850lm 300 LED	12v 14.4w per 1m	Using Havit LED Controllers

VIPER Kits

Cool White LED Strip Lighting Kits

IMAGE	LENGTH	PART NUMBER	SMD	IP RATING	COLOUR TEMP	OUTPUT	POWER	DIMMABLE
	2 mtr	VPR9734IP54-60-2M	3528	IP54 WATER RESISTANT	Cool white, 5500k	860lm 120 LED	12v 4.8w per 1m	Using Havit LED Controllers
	5 mtr	VPR9734IP54-60-5M	3528	IP54 WATER RESISTANT	Cool white, 5500k	2150lm 300 LED	12v 4.8w per 1m	Using Havit LED Controllers
	2 mtr	VPR9764IP54-60-2M	5050	IP54 WATER RESISTANT	Cool white, 5500k	2580lm 120 LED	12v 14.4w per 1m	Using Havit LED Controllers
	5 mtr	VPR9764IP54-60-5M	5050	IP54 WATER RESISTANT	Cool white, 5500k	6450lm 300 LED	12v 14.4w per 1m	Using Havit LED Controllers

All low voltage products that specify LED or are supplied with a 12v LED globe must be used with a suitable LED driver, refer to pages (188 - 192)