




Lille Aluminium Black Garden Spike Bollard Lights

Name	Lille
Material	Aluminium
Colour	Poly Powder Coated Black
IP Rating	IP65
Input Voltage	12v DC or 24v DC
Colour Temp	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000k <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000k <div style="width: 10px; height: 10px; background-color: #00CED1; border: 1px solid black;"></div> 5500k </div>
IK Rating	IK08
Installation Type	Ground - Spike
Diffuser Type	Clear Glass
Lamp Base	Built in LED
Max Wattage	2.5w or 2x 2.5w
Cable Length	2500mm
Protection Class	3 (Low Voltage - No Earth Required)
Lamp Expectancy	<30,000hrs*
CRI	CRI>80
SDCM	<6
UGR	<12
Dimmable	Yes - Triac Dimmable when used with 12v DC Only
Warranty	3 Years Replacement*

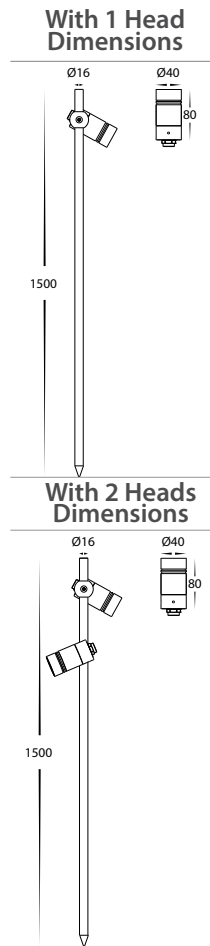

Optional Havit Compatible Accessories


Image	Part Number	Description
Fittings, Lenses + Hooded Cover		
	HV1441-POST	Post to suit HV1441T-4BLK
	HV1441-L-LENS	Linear Lens
	HV1441-HC	Honeycomb Lens for anti glare
	HV1441-HOOD	Hooded Cover
Drivers		
	Non Dimmable LED Drivers	See Catalogue or Website for full range of Non Dimmable LED Drivers
	12v DC Triac Dimmable LED Drivers	See Catalogue or Website for full range of 12v DC Triac Dimmable LED Drivers
Dali Relay Modules		
	HV9107-2303SAC-HP	Dali Dimmable Relay Module to be used with Triac Dimmable LED Drivers when Dali Control is required
	HV9107-2701S-N	Dali On-Off Relay Module to be used with Non Dimmable LED Drivers when Dali Control is required
Weatherproof Connectors		
	HV9911	Small IP67 Weatherproof Connector
	HV9912	Medium IP67 Weatherproof Connector
	HV9913	Large IP67 Weatherproof Connector



Warranty
Terms & Conditions

Website

Product Ordering

Image	Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
	HV1441T-BLK	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000K <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000K <div style="width: 10px; height: 10px; background-color: #00CED1; border: 1px solid black;"></div> 5500K </div>	130lm 150lm 140lm	12v DC or 24v DC	40°	TRI Colour 2.5w Built in LED	9350418036865



Havit Lighting 143 Beauchamp Road, Matraville, N.S.W. 2036 | Phone: 02 9381 8300 | Fax: 02 9381 6661 | Email: sales@havit.com.au | Web: www.havit.com.au

*See Warranty Terms & Conditions for more information