



# Lille Aluminium Black Garden Spike Bollard Lights


<b>Name</b>	Lille
<b>Material</b>	Aluminium Fitting + Plastic Post
<b>Colour</b>	Poly Powder Coated Black (Fitting)
<b>IP Rating</b>	IP65
<b>Input Voltage</b>	12v DC or 24v DC
<b>Colour Temp</b>	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000k             <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000k             <div style="width: 10px; height: 10px; background-color: #00CED1; border: 1px solid black;"></div> 5500k           </div>
<b>IK Rating</b>	IK08
<b>Installation Type</b>	Ground - Spike
<b>Diffuser Type</b>	Clear Glass
<b>Lamp Base</b>	Built in LED
<b>Max Wattage</b>	2.5w or 2x 2.5w
<b>Cable Length</b>	2500mm
<b>Protection Class</b>	3 (Low Voltage - No Earth Required)
<b>Lamp Expectancy</b>	<30,000hrs*
<b>CRI</b>	CRI>80
<b>SDCM</b>	<6
<b>UGR</b>	<12
<b>Dimmable</b>	Yes - Triac Dimmable when used with 12v DC Only
<b>Warranty</b>	3 Years Replacement*

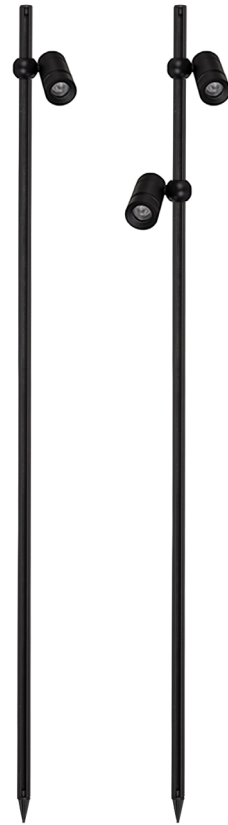

HV1441T-1-BLK Dimensions


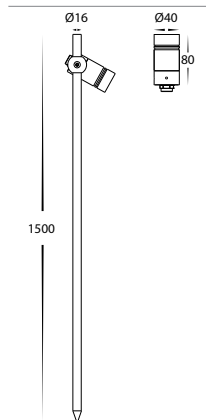


HV1441T-2-BLK Dimensions

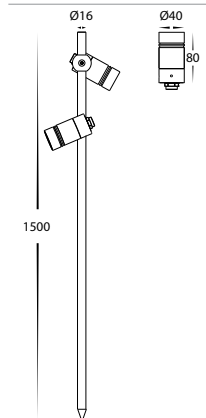

## Optional Havit Compatible Accessories

Image	Part Number	Description
<b>Fittings, Lenses + Hooded Cover</b>		
	<a href="#">HV1441T-BLK</a>	Additional Fitting to suit HV1441T-1-BLK
	<a href="#">HV1441-L-LENS</a>	Linear Lens
	<a href="#">HV1441-HC</a>	Honeycomb Lens for anti glare
	<a href="#">HV1441-HOOD</a>	Hooded Cover
<b>Drivers</b>		
	<a href="#">Non Dimmable LED Drivers</a>	See Catalogue or Website for full range of Non Dimmable LED Drivers
	<a href="#">12v DC Triac Dimmable LED Drivers</a>	See Catalogue or Website for full range of 12v DC Triac Dimmable LED Drivers
<b>Dali Relay Modules</b>		
	<a href="#">HV9107-2303SAC-HP</a>	Dali Dimmable Relay Module to be used with Triac Dimmable LED Drivers when Dali Control is required
	<a href="#">HV9107-2701S-N</a>	Dali On-Off Relay Module to be used with Non Dimmable LED Drivers when Dali Control is required
<b>Weatherproof Connectors</b>		
	<a href="#">HV9911</a>	Small IP67 Weatherproof Connector
	<a href="#">HV9912</a>	Medium IP67 Weatherproof Connector
	<a href="#">HV9913</a>	Large IP67 Weatherproof Connector



Warranty Terms & Conditions

Website

## Product Ordering

Image	Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
	<b>HV1441T-1-BLK</b>	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #FFD700; border: 1px solid black;"></div> 3000K             <div style="width: 10px; height: 10px; background-color: #ADD8E6; border: 1px solid black;"></div> 4000K             <div style="width: 10px; height: 10px; background-color: #00CED1; border: 1px solid black;"></div> 5500K           </div>	130lm 150lm 140lm	12v DC or 24v DC	40°	<b>TRI Colour</b> 2.5w Built in LED	9350418042330
	<b>HV1441T-2-BLK</b>	2x 130lm 2x 150lm 2x 140lm	<b>TRI Colour</b> 2x 2.5w Built in LED				



Havit Lighting 143 Beauchamp Road, Matraville, N.S.W. 2036 | Phone: 02 9381 8300 | Fax: 02 9381 6661 | Email: sales@havit.com.au | Web: www.havit.com.au

\*See Warranty Terms & Conditions for more information