


Technical Specifications

MODEL		HV9650S
OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	0.83A
	CURRENT RANGE	0~83A
	RATED POWER	10W
	RIPPLE&NOISE(max)	<700mV
	VOLTAGE TOLERANCE	±0.5V
INPUT	VOLTAGE RANGE	170~265VAC
	FREQUENCY RANGE	47~63Hz
	POWER FACTOR(Typ.)	0.8
	EFFICIENCY(Typ.)	80%
	AC CURRENT(Typ.)	0.090A/220VAC
PROTECTION	Short circuit	Protection type:Hicpcpe mode,recovers automatically after condition is removed
	Overload	0.83A-1.5A
ENVIRONMENT	WORKING TEMP.	-30~+50°C (Refer to output load derating curve)
	INGRESS PROTECTION	IP67 design for indoor or outdoor installations
	STORAGE TEMP	-40~+80°C
SAFETY	SAFETY STANDARDS	EN61347-1;EN61347-2-13;SELV; IP67 approved
	WITHSTAND VOLTAGE	I/P-O/P:2KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC
NOTE	1.All parameters NOT specially mentioned are measured at 220VAC input,rated load and 25°C of ambient temperature. 2.Ripple&noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf&47uf parallel capacitor. 3.Tolerance:includes set up tolerance,line regulation and load regulation.	

Product Dimensions

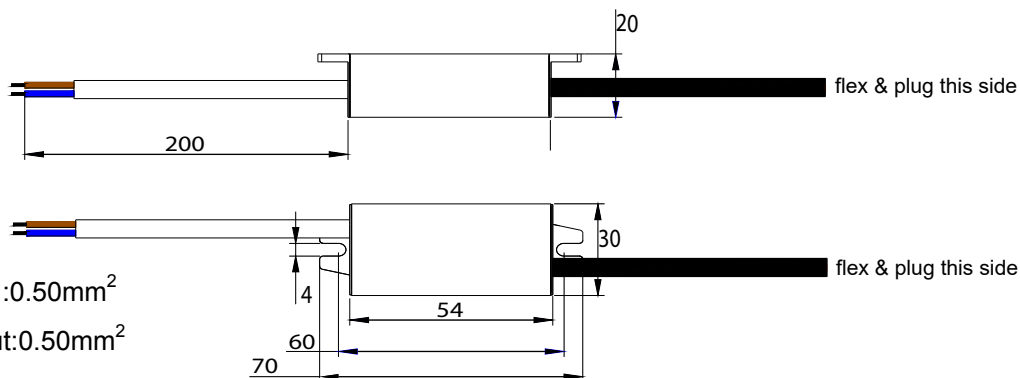

Cable size of input :0.50mm²
 Cable size of output:0.50mm²