

Lisse Aluminium White

- Slim wall light
- Aluminium Poly Powder Coated White
- Tempered glass
- IP Rating: IP54


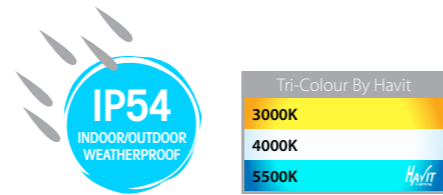



IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3641T-WHT	3000K 4000K 5500K	240lm 250lm 240lm	240v	Tri-Colour Built-in 4w LED
	HV3641T-WHT-12V	3000K 4000K 5500K	240lm 250lm 240lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3642T-WHT	3000K 4000K 5500K	2x 180lm 2x 187lm 2x 195lm	240v	Tri-Colour Built-in 2x 3w LED
	HV3642T-WHT-12V	3000K 4000K 5500K	2x 180lm 2x 187lm 2x 195lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3643T-WHT	3000K 4000K 5500K	360lm 375lm 390lm	240v	Tri-Colour Built-in 6w LED
	HV3643T-WHT-12V	3000K 4000K 5500K	360lm 375lm 390lm	12v DC	
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3644T-WHT	3000K 4000K 5500K	2x 300lm 2x 310lm 2x 325lm	240v	Tri-Colour Built-in 2x 5w LED
	HV3644T-WHT-12V	3000K 4000K 5500K	2x 300lm 2x 310lm 2x 325lm	12v DC	





**Fixed Down
HV3641T-WHT**

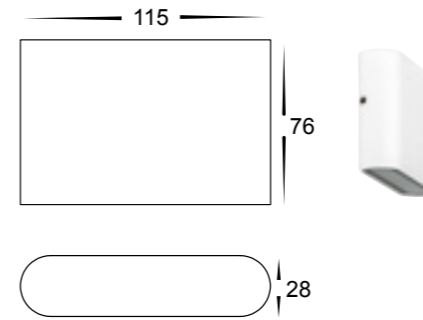


**Fixed Down
HV3643T-WHT**

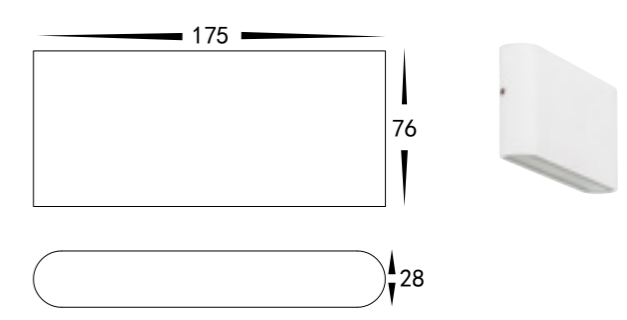

**Up & Down
HV3642T-WHT**

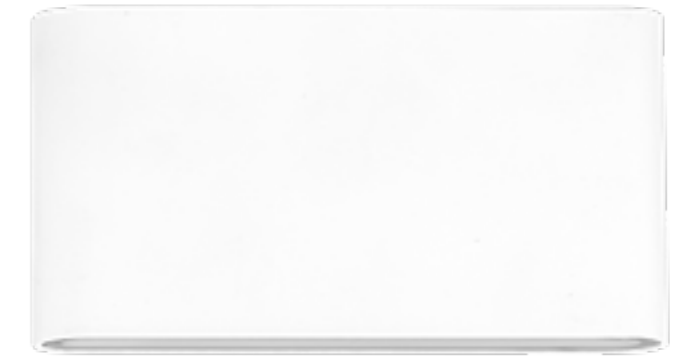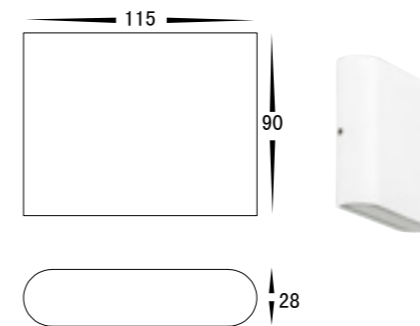

**Up & Down
HV3644T-WHT**

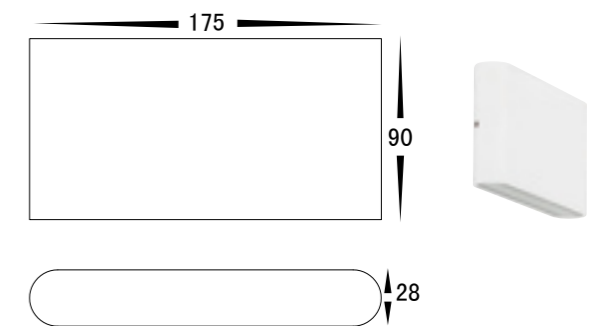

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336