


70mm Fixed  
HV5511T-BLK



90mm Tilt  
HV5512T-BLK

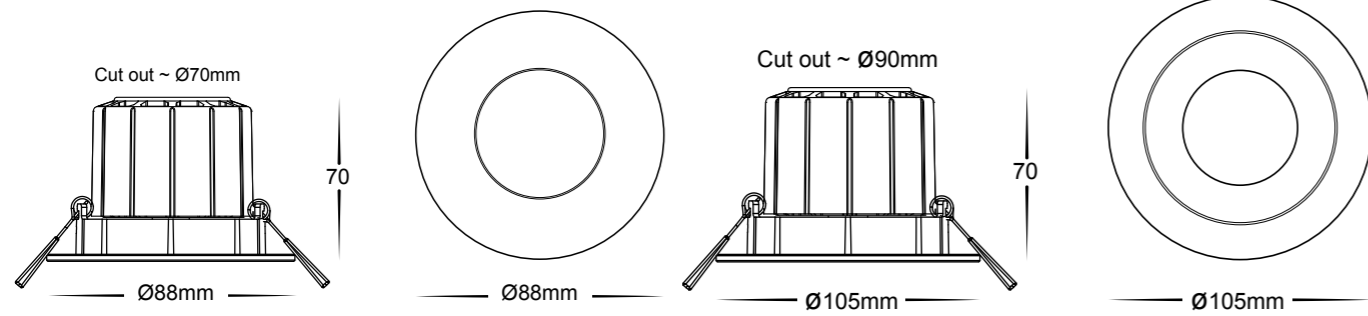

### Prime Aluminium Black

- Dimmable LED downlights
- Aluminium Black
- Supplied with dimmable driver complete with flex & plug
- 45° beam angle
- CRI>90
- IP Rating: IP54



IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5511T-BLK</b>	70mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	<b>Tri-Colour</b> Built-in 12w LED
	<b>HV5512T-BLK</b>	90mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	<b>Tri-Colour</b> Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274. Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

76mm Fixed Deep  
HV5513T-BLK



90mm Fixed Deep  
HV5514T-BLK

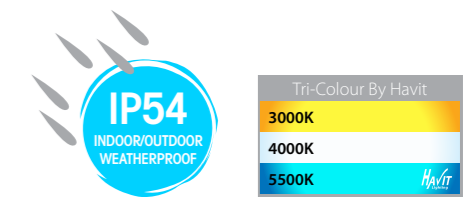
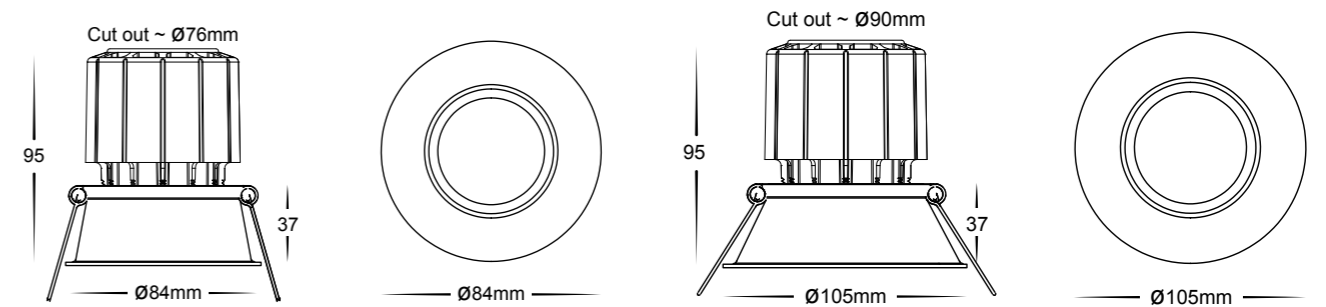


IMAGE	PART NUMBER	CUT OUT	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV5513T-BLK</b>	76mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	<b>Tri-Colour</b> Built-in 12w LED
	<b>HV5514T-BLK</b>	90mm	3000K 4000K 5500K	980lm 990lm 1000lm	240v	<b>Tri-Colour</b> Built-in 12w LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274. Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336