



Pointe 316 Stainless Steel

- Single adjustable spike spotlight
- Stainless Steel 316 Marine Grade
- 2x 238mm spike length (total 476mm)
- 2m reinforced cable
- IP Rating: IP65

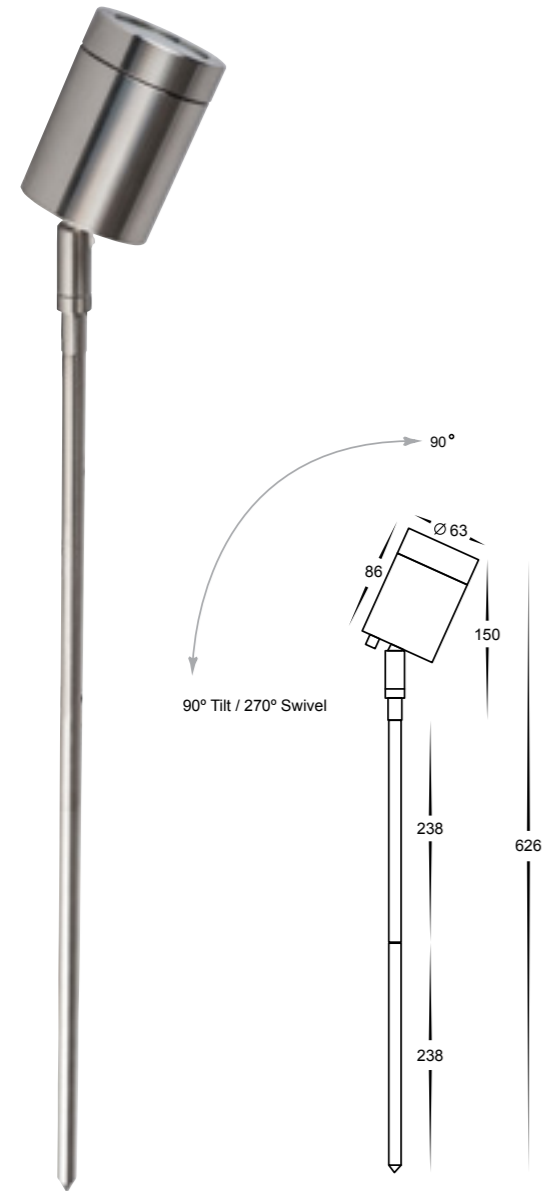



Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globe

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1401T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

Eden 316 Stainless Steel

- Single adjustable spike spotlight
- Stainless Steel 316 Marine Grade
- 245mm spike length
- 2m reinforced cable
- IP Rating: IP65

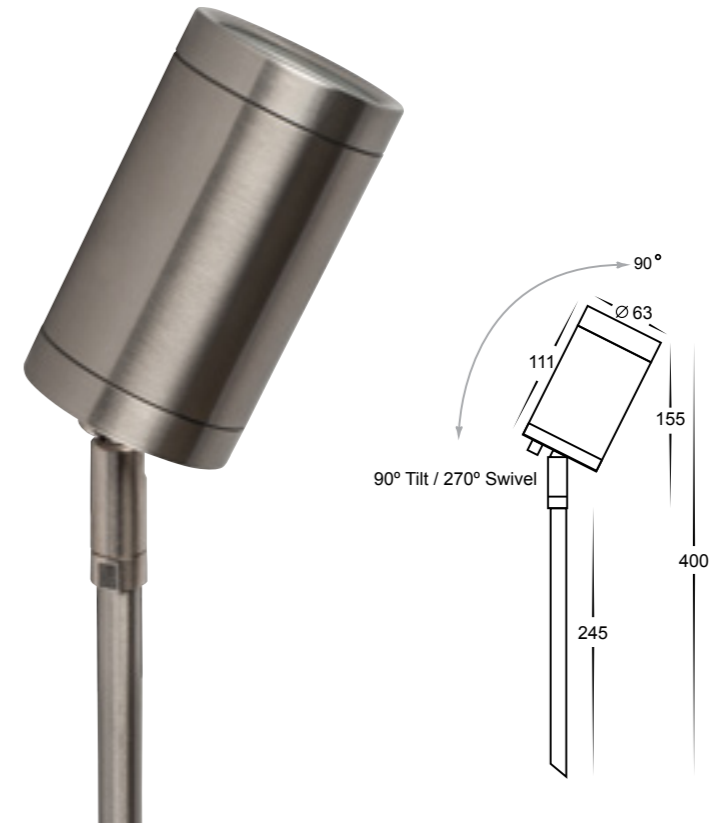

Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globe

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV1402T	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336