






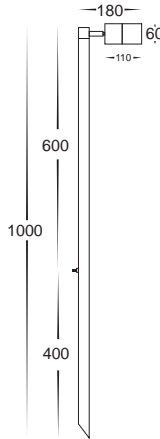



# 316 Stainless Steel Garden Spike Lights

|   |   |                     |
|---|---|---------------------|
|   | <h2>HV1401C <span style="float: right;">12v LED 5w</span></h2> <h2>HV1401W</h2>   |                     |
|   | <p>Single adjustable spike spotlight</p> <p>Stainless steel 316 marine grade</p> <p>2x238mm spike length (total 476mm)</p> <table border="1"> <tr> <td>2m reinforced cable</td> <td>12v MR16 20w max</td> </tr> </table> <p>Cool white, 6000k, 300lm (HV1401C)<br/>Warm white, 3000k, 250lm (HV1401W)</p> <p>IP rating: IP65</p> <p>Can be used with a halogen globe</p> <p>Must be used with a suitable LED driver<br/>(Refer to Pages 153-158)</p> <p><b>Supplied with a replaceable 5w LED globe</b> </p> | 2m reinforced cable |
| 2m reinforced cable   | 12v MR16 20w max  |                     |

|   |   |                    |
|---|---|--------------------|
|   | <h2>HV1402C <span style="float: right;">12v LED 5w</span></h2> <h2>HV1402W</h2>   |                    |
|   | <p>Single adjustable spike spotlight</p> <p>Stainless steel 316 marine grade</p> <table border="1"> <tr> <td>245mm spike length</td> <td>2m reinforced cable</td> </tr> </table> <p>12v MR16 20w max</p> <p>Cool white, 6000k, 300lm (HV1402C)<br/>Warm white, 3000k, 250lm (HV1402W)</p> <p>IP rating: IP65</p> <p>Can be used with a halogen globe</p> <p>Must be used with a suitable LED driver<br/>(Refer to Pages 153-158)</p> <p><b>Supplied with a replaceable 5w LED globe</b> </p> | 245mm spike length |
| 245mm spike length  | 2m reinforced cable   |                    |

|   |   |                |                     |                     |
|---|---|----------------|---------------------|---------------------|
|   | <h2>HV1403C <span style="float: right;">12v LED 5w</span></h2> <h2>HV1403W</h2>   |                |                     |                     |
|   | <p>Single adjustable spike spotlight</p> <p>Stainless steel 316 marine grade</p> <table border="1"> <tr> <td>Internal cable</td> <td>1000mm spike length</td> </tr> <tr> <td>2m reinforced cable</td> <td>12v MR16 20w max</td> </tr> </table> <p>Cool white, 6000k, 300lm (HV1403C)<br/>Warm white, 3000k, 250lm (HV1403W)</p> <p>IP rating: IP65</p> <p>Can be used with a halogen globe</p> <p>Must be used with a suitable LED driver<br/>(Refer to Pages 153-158)</p> <p><b>Supplied with a replaceable 5w LED globe</b> </p> | Internal cable | 1000mm spike length | 2m reinforced cable |
| Internal cable  | 1000mm spike length   |                |                     |                     |
| 2m reinforced cable   | 12v MR16 20w max  |                |                     |                     |