



HV1807C		240v LED 5w
HV1807W		
In-ground uplighter Round		
Stainless steel 316 marine grade cover		
Full stainless steel body		
Flush tempered glass	Trafficable to 600kg	
Cut out not using plastic canister: 76mm		
Cut out using plastic canister: 90mm		
Face diameter: 100mm	Installation depth: 175mm	
NOTE: adequate drainage must be allowed		
GU10 35w max		
Cool white, 6000k, 300lm (HV1807C)		
Warm white, 3000k, 250lm (HV1807W)		
IP rating: IP65		
Can be used with a halogen globe		



Supplied with a replaceable 5w LED globe

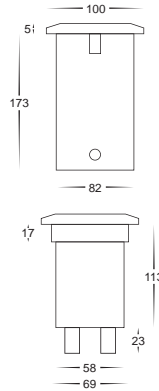


HV1808C		12v LED 5w
HV1808W		
In-ground uplighter round		
Stainless steel 316 marine grade cover		
Full stainless steel body		
Flush tempered glass	Trafficable to 600kg	
Cut out not using plastic canister: 76mm		
Cut out using plastic canister: 90mm		
Face diameter: 100mm	Installation depth: 175mm	
NOTE: adequate drainage must be allowed		
MR16 20w max		
Cool white, 6000k, 300lm (HV1808C)		
Warm white, 3000k, 250lm (HV1808W)		
IP rating: IP65		
Can be used with a halogen globe		
Must be used with a suitable LED driver (Refer to Pages 153-158)		

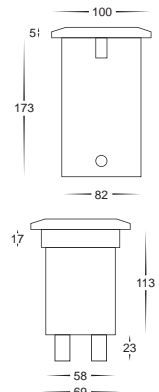

Supplied with a replaceable 5w LED globe



HV1821C		12v LED 5w
HV1821W		
In-ground uplighter round adjustable lamp(30°)		
Stainless steel 316 marine grade cover		
Flush tempered glass	Trafficable to 600kg	
Cut out not using plastic canister: 118mm		
Cut out using plastic canister: 123mm		
Face diameter: 130mm	Installation depth: 140mm	
NOTE: adequate drainage must be allowed		
MR16 20w max		
Cool white, 6000k, 300lm (HV1821C)		
Warm white, 3000k, 250lm (HV1821W)		
IP rating: IP65		
Can be used with a halogen globe		
Must be used with a suitable LED driver (Refer to Pages 153-158)		

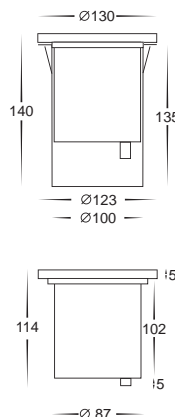

Supplied with a replaceable 5w LED globe

