



## GEM SO3701/L/TC/DP - 8/30W

LED Oyster 8 to 30 watt satin nickel trim deco with selectable colour temperature and dual power

### Application

A perfect choice for apartments, residential or commercial spaces

### Design Specifications

- Select colour temperature with the integral DIP switch, 3000K, 4000K, 6000K
- Durable white powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency SMD LED chips, CRI >80
- Satin Nickel plated deco trim, two versatile profile sizes 8/18 or 15/30 watt
- Integral constant current non-dimmable LED driver, with selectable power. SENSOR OPTION - Integrated microwave motion sensor (SO3701/40L only).



### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI/DSI (SO3701/40L/TC/DP)**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**

### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
SO3701/30L/TC/DP	LED OYSTER 8/16W 310mm TC / DP	240	8/16	1070/1170/11100	3000/4000/6000	80
SO3701/40L/TC/DP	LED OYSTER 30W 390mm TC / DP	240	15/30	2250/2250/2330	3000/4000/6000	80


Model No.	Beam Angle (°)	Body Colour	Dimensions (mm)	Diameter (mm)
SO3701/30L/TC/DP	120	SATIN	100(H)	310
SO3701/40L/TC/DP	120	SATIN	112(H)	390

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

Lumens (lm) shown are displayed at maximum power



## Dimensions

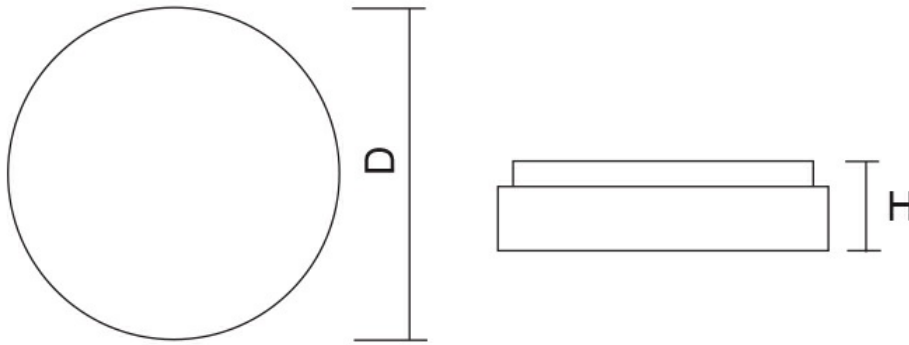

## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**SO3701/30L/TC/DP at 4000K**

**SO3701/40L/TC/DP at 4000K**

