



SINCE
BUILDING
THE BEST **1886**



BayportTM

Packed full of Hunter's quality and durability, this traditional styled compact performer has been designed to compliment smaller rooms and bedrooms with the White/Light Oak reversible blades.

24170 White with four White / Light Oak reversible plywood blades



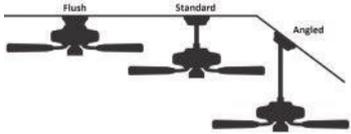

Bayport™

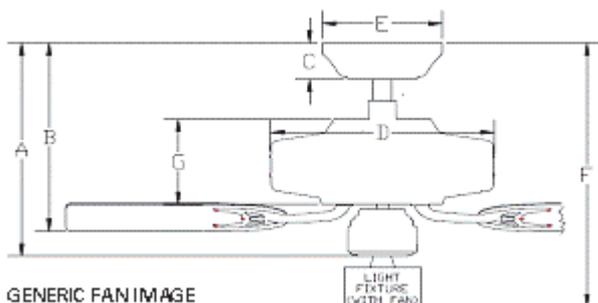
White



White

Light Oak

SIZE & BLADES:	112cm (44") Dia. from blade tip to blade tip.				
	Four reversible plywood blades. The blades are reversible with different finishes designed to compliment the motor colour.				
	13 Degree blade pitch.				
MOTOR:	Hunter's WhisperWind® motor. 16 pole. 172 x 12mm 80Watt motor with heavy gauge copper windings, silicon steel laminations, and precision sealed bearings, for quiet operation, year after year.				
CONTROLLER:		Supplied with pull chain for fan operation.			
		<ul style="list-style-type: none"> Suitable with Hunter wall controls. Suitable with Hunter remote controls. 			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	Easy to install in one of 3 mounting positions: <ul style="list-style-type: none"> Flush mounting on flat ceilings. Standard mounting on flat ceilings. Angled mounting on raked ceilings up to 34-Deg. 				
LIGHT KIT:	<ul style="list-style-type: none"> Suitable for use with most Hunter light kits 				
FEATURES:	Reversing switch for both summer and winter operation. <ul style="list-style-type: none"> Save up to 47% on summer cooling costs, Save up to 24% on winter heating costs. 				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M³/HR)	EFFICIENCY (in M³/HR/W)
	HIGH:	58.0	253	7,059	121.70
	MEDIUM:	32.2	201	5,393	167.50
	LOW:	14.5	127	3,276	225.90
	* Wattage for Energy Star data and is based on actual not rated value as shown on rating label ** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)				



A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
35.20	28.09	8.26	24.13	15.75	N/A	12.19
FLUSH MOUNT (cm) NB: No downrod installed.						
28.02	20.90	8.26	24.13	15.75	N/A	12.19
ANGLED MOUNT (cm) Using optional 91cm downrod accessory.						
119.02	111.91	8.26	24.13	15.75	N/A	12.19

GENERIC FAN IMAGE