



BUILDING THE BEST SINCE 1886



Vista™

Properly designed, a fan with a traditional feel creates a timeless quality as well. Should these two traits strike you as impossibly contradictory, look no further than the beauty and craftsmanship of the Vista for an impressive resolution. Vista is an impressive performer.

24041 Brushed Nickel with five Maple/ Cherry blades & Glass Light kit







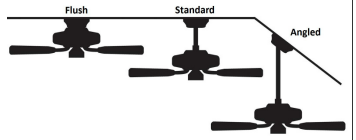


Vista™


Brushed Nickel



Maple

Cherry

SIZE & BLADES:	132cm (52") Dia. from blade tip to blade tip.				
	Five reversible plywood blades.				
	12 Degree blade pitch.				
MOTOR:	Hunter's patented AirMax™ motor with internal impellers. 16 pole. 172 x 15mm 100Watt motor with heavy gauge copper windings, silicon steel laminations, precision sealed bearings, and multiple cooling fins, all in a rugged die cast aluminium housing				
CONTROLLER:		Supplied with 3 speed pull chain for fan operation. <ul style="list-style-type: none"> Suitable with Hunter wall controls. Suitable with Hunter remote controls. 			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	3 mounting options: <ul style="list-style-type: none"> Flush mounting on flat ceilings. Standard mounting on flat ceilings. Angled mounting on raked ceilings up to 34-Deg. 				
LIGHT KIT:	Includes Scavo Bowl Light Kit - 2 x 60W Max. - Can be fitted with Energy Saving CFL light globes.				
FEATURES:	Reversing switch for both summer and winter operation. <ul style="list-style-type: none"> Save up to 47% on summer cooling costs, Save up to 24% on winter heating costs 				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M³/HR)	EFFICIENCY (in M³/HR/W)
	HIGH:	70.0	200	9,645	137.8
	MEDIUM:	47.0	166	7,634	162.4
	LOW:	22.0	108	4,925	223.9
	* Wattage for Energy Star data and is based on actual not rated value as shown on rating label ** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)				

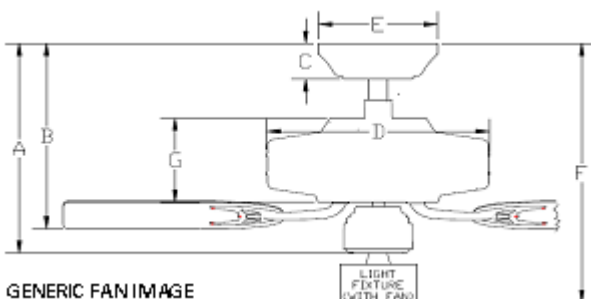

GENERIC FAN IMAGE

A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
31.80	29.20	8.26	30.20	15.75	48.30	12.17
FLUSH MOUNT (cm) NB: No downrod installed.						
24.61	22.01	8.26	30.20	15.75	41.11	12.17
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
115.52	113.02	8.26	30.20	15.75	132.02	12.17