

DIMMABLE CONSTANT VOLTAGE LED DRIVER

DIM2IN1



- Suitable for LED strip
- Aluminium casing for durability in exterior applications and outdoor constant voltage light fittings
- Trailing edge and 1-10V dimming combined
- Independent compact design
- Safe no load operation
- Overload protection
- Short circuit protection
- Overheating protection
- SELV and EMC compliant
- 1.2 m flex & 3 pin plug fitted
- Output fly leads at secondary end

RECOMMENDED TRAILING EDGE DIMMERS

- SDA450
- SDD350TCM
- SDD350BT

RECOMMENDED 1-10V CONTROLLER


- SDF30

APPLICATION


- Use with LED strip and constant voltage fitting

WIRING DIAGRAM


Trailing Edge option

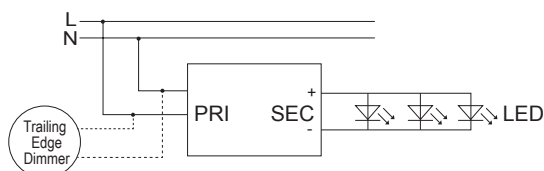

1-10V dimming option

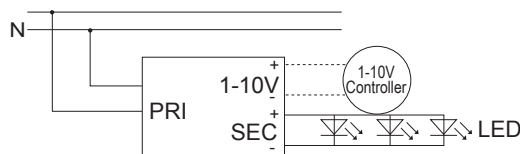

DIMENSIONS

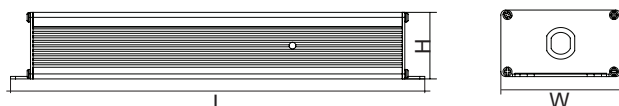

Model No.	Input	Power	Min. Load*	Power Factor	Output	Dimensions L x W x H	Dimming Type	Working Temperature
DIM2IN1/96/12V	240V	96W	10W	>0.90	12V	201 x 73 x 37.5 mm	Trailing edge & 1-10V	-20°C ~ 50°C
DIM2IN1/96/24V	240V	96W	10W	>0.90	24V	201 x 73 x 37.5 mm	Trailing edge & 1-10V	-20°C ~ 50°C
DIM2IN1/192/12V	240V	192W	20W	>0.90	12V	202 x 96 x 39 mm	Trailing edge & 1-10V	-20°C ~ 50°C
DIM2IN1/192/24V	240V	192W	20W	>0.90	24V	202 x 96 x 39 mm	Trailing edge & 1-10V	-20°C ~ 50°C

*When phase out dimming is required

