

LED DIRECTIONAL LAMP

AR111 LAMP

CONSTRUCTION

- Die-cast aluminium body
- High output COB LED chip
- Specially designed optical lens
- 12V AC or DC driver required
- Standard beam angle 24°

FEATURES

- Compatible with most electronic transformers
- Suits most halogen AR111 lamp fittings

COLOUR TEMPERATURE

- 3000K Warm White




BEAM ANGLE OPTION

- 40° optical lens

LAMP BASE

- G53

DIMENSIONS



Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable
AR111/700WW LED	12V AC or DC	12W	750lm	3000K	24°	>80	Yes*

*Dimmable with MINI60

LED DIRECTIONAL LAMP

AR111 MODULE

CONSTRUCTION

- Die-cast aluminium body
- High output COB LED chip
- Specially designed optical lens
- Changeable multi-reflector system
- Constant current LED driver required


BEAM ANGLE

- 24° (standard)
- AR111/1700: 40° (option)
- AR111/3500: 20°, 60° (option)

COLOUR TEMPERATURE

- 3000K Warm White (standard)
- AR111/1700: 4000K Cool White (standard)

DIMENSIONS

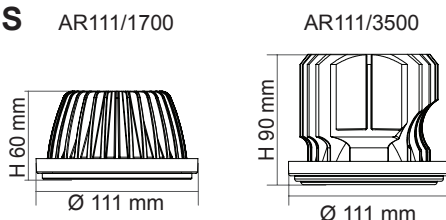

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Suggested Driver
AR111/1700WW LED	500mA	20W	1700lm	3000K	24°	>80	Yes*	DIM500MA/18W
AR111/1700CW LED	500mA	20W	1700lm	4000K	24°	>80	Yes*	DIM500MA/18W
AR111/3500WW	1050mA	35W	3300lm	3000K	40°	>80	No	PLUTO1050MA/40W

*Dimmable with trailing edge dimming control gear



www.sal.net.au

Specifications above are for reference only and may vary without prior notice