

DIMMABLE CONSTANT CURRENT LED DRIVER

PLUTO 350mA, 500mA, 700mA, 1400mA

- Independent compact design
- Captured terminal screws
- Safe no load operation
- Overload protection
- Short circuit protection
- Overheating protection
- SELV and EMC compliant
- Dimmable with trailing edge dimmer
- Dimming range 10%~100%


IP RATING

- IP20 suitable for interior use only



RECOMMENDED DIMMERS

- SDA450
- SDD350TCM and SDD350TCS
- SDD350BT

WIRING DIAGRAM

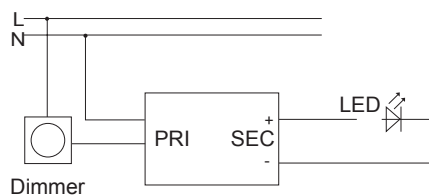


DIMENSIONS

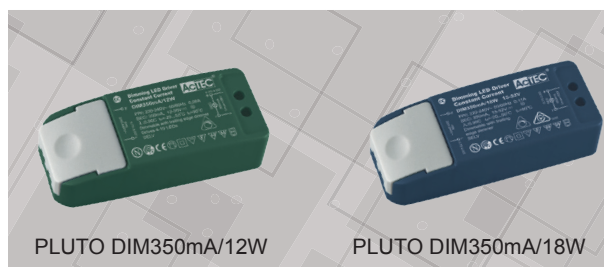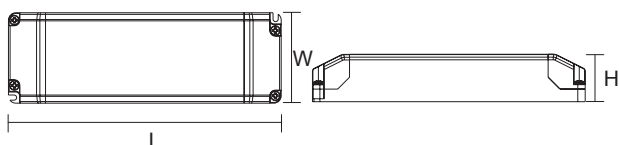

PLUTO DIM350mA/12W

PLUTO DIM350mA/18W

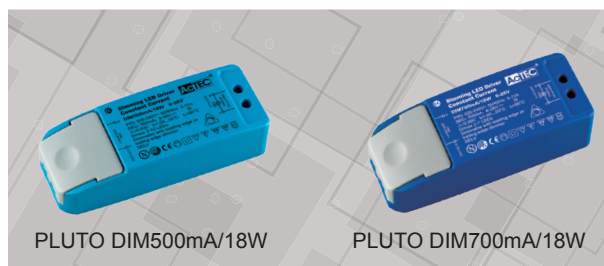

PLUTO DIM500mA/18W

PLUTO DIM700mA/18W



DIM700mA/36W



DIM1400mA/36W

Model No.	Input	Max. Output Power	Output	Output Current	Power Factor	Dimensions L x W x H
DIM350mA/12W	240V	12W	18~35V	350mA	0.90	98 x 39 x 22 mm
DIM350mA/18W	240V	18W	15~52V	350mA	0.90	113 x 44 x 28 mm
DIM500mA/18W	240V	18W	9~36V	500mA	0.90	113 x 44 x 28 mm
DIM700mA/18W	240V	18W	6~26V	700mA	0.90	113 x 44 x 28 mm
DIM700mA/30W	240V	30W	26~43V	700mA	0.90	140 x 45 x 28 mm
DIM700mA/36W	240V	36W	24~52V	700mA	0.90	166 x 52 x 24 mm
DIM1400mA/36W	240V	36W	9~26V	1400mA	0.90	166 x 52 x 24 mm