



DALI 75/120/150 - 12V/24V


Australian approved, dimmable constant voltage, DALI 2.0 power supply.

Application

Reliable constant voltage dimmable driver with DALI 2.0 certified by DiiA

Design Specifications

- Choice of 75 watt / 24V, 150 watt / 24V or 120 watt / 12V, minimum load 5 watt
- DALI 2.0 certified by DiiA
- Overload and short circuit protection, DALI and Push DIM control with > 12 bit dimming resolution
- SELV and EMC compliant, fixed terminal termination
- flickerCONTROLLED technology, **perfect for LED strip applications**
- Electrical class II, Do Not Cover.

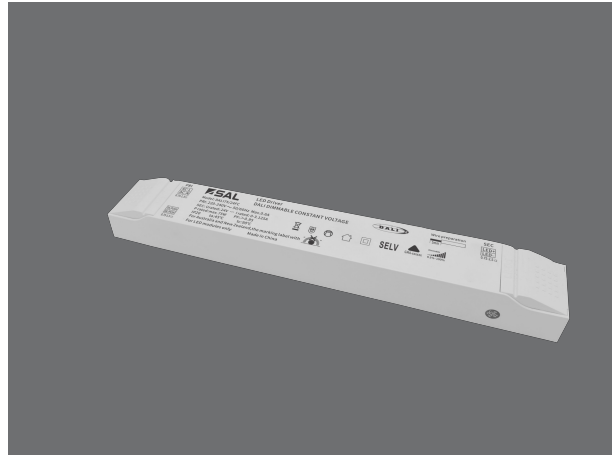

Performance

- Dimmable - **YES**
- Dimmer Type - **DALI2**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Output Voltage (V/DC)	Power (W)	Power Factor	Dimmable
	DALI75/24V	240	24	75	0.95	YES
	DALI150/24V	240	24	150	0.95	YES
	DALI120/12V	240	12	120	0.95	YES



Dim (mm)	
	300(L) x 43(W) x 31(H)
	361(L) x 43(W) x 31(H)
	361(L) x 43(W) x 31(H)

NOTE: Before using the PUSH DIM function, please ensure the driver (L/N supply) is powered ON FIRST, to prevent damage to the PUSH DIM terminations.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions



• Wiring Diagram of Brightness Changing In Push Dimming Mode



• Wiring Diagram of DALI Dimming Operation

