



ECOSTAR II GIMBAL S9146TC - 10W


Dimmable gimbal LED downlight, with selectable colour temperature

Application

Ideal for any residential or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile, 45 degree gimbal
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-faceted reflector system, standard 60 degree beam distribution, optional 25 and 40 degree
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug, optional CRI>90 warm white only

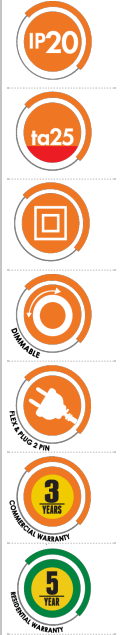

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	Dimmable
S9146TC/WH	240	10	750/900/850	3000/4000/6000	60	YES


Model No.	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
S9146TC/WH	80	WHITE	92	103	73(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions

S9146

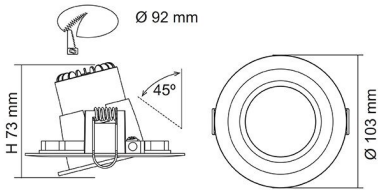

Photometric Data

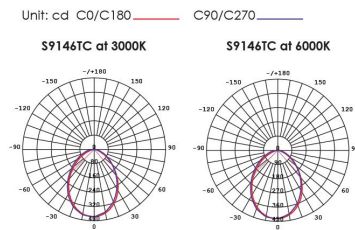

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

