



FLEXI SMART 12V RGB COLOUR 1P44, FLP12V/RGBBT

2m and 5m RGB smart lighting LED strip kits

Application

Home theatre, bar features, decorative task illumination demanding smart controls

Design Specifications

- Smart LED strip kit colour and brightness controlled via the remote included or via the SAL PIXIE or PIXIE PLUS
- Four different flashing modes with dimming memory function
- High performance, stable, even light output, pre-wired for easy installation, plug-in & ready to use and cuttable every 100 mm. NOTE: when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads
- Choice of 2M and 5M packs available, IP44 strip only, IP20 driver.
- Heatsink required for system performance
- Dimming is achieved via the PIXIE or PIXIE PLUS app (strip controller if supplied) or via a SAL Multifunction control. Trailing edge dimmers are not suitable



Performance

Dimmable - **YES**

Dimmer Type - **PIXIE or REMOTE control**

Technical Specification

Model No.	Input Voltage (V/AC)	Beam Angle (°)	Dim (mm)	Dimmable	Watts per metre (W/m)	Colour Temp. (K)
FLP12V2M/RGBBT	240	115	2000(L) x 10(W) x 3(H)	YES	6	RGB
FLP12V5M/RGBBT	240	115	5000(L) x 10(W) x 3(H)	YES	6	RGB


Technical Specification

Model No.	LEDs Per Metre
FLP12V2M/RGBBT	30
FLP12V5M/RGBBT	30

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Cutable locations

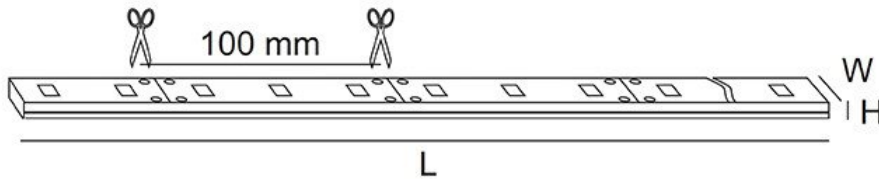

Product Images

