



IR SENSOR SMS815

IR Low Voltage 12/24V sensor control

Application

Versatile sensor for concealed residential and commercial applications

Design Specifications

- Rated supply 12 or 24V DC, (supply driver sold separately)
- Output power at 12V max 30 watt, at 24V max 60 watt
- The sensor is designed with two versatile detecting modes and a power OFF memory function. Detection range < 50mm.
- IR switch controller designed for Class III insulated lighting products
- Designed with a low profile face design of 18 mm diameter x 11 mm in length
- Dimensions: refer to installation instructions



Performance


In Built Sensor - **YES**

Technical Specification

Model No.	Input Voltage (V/DC)	Power (W)	Body Colour
SMS815	24	60	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

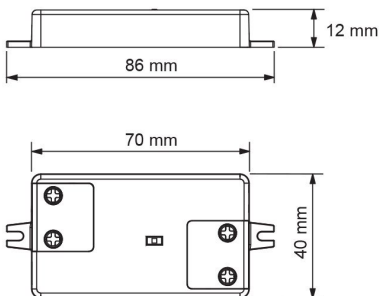



Selection of optional
key caps and cover plate
designs available

PIXIE AMBIENCE, CHANGE YOUR STYLE.

The innovative PIXIE AMBIENCE GPO has been designed with the end user and installer in mind, allowing you to change the style or the colour face plate as fashion demands.

In addition to the standard 240V, 2400watt capacity, the AMBIENCE double GPO includes an innovative PIXIE Multifunction control, which when paired with another PIXIE Master device, you can create a scene, set a schedule and more!

For more
information
please
scan me

