



L-LINE MKII S9734 - 38W

LED louvre troffer MKII

Application

LED conventional commercial troffer design for interior spaces


Design Specifications

- Pressed steel body profile
- Quality white powder coated finish
- Double parabolic matt aluminium louvre
- High efficiency SMD LED chips UGR <19
- Opal polycarbonate LED diffuser, CRI > 80, CCT 4000K
- 240V constant current non-dimmable LED driver

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

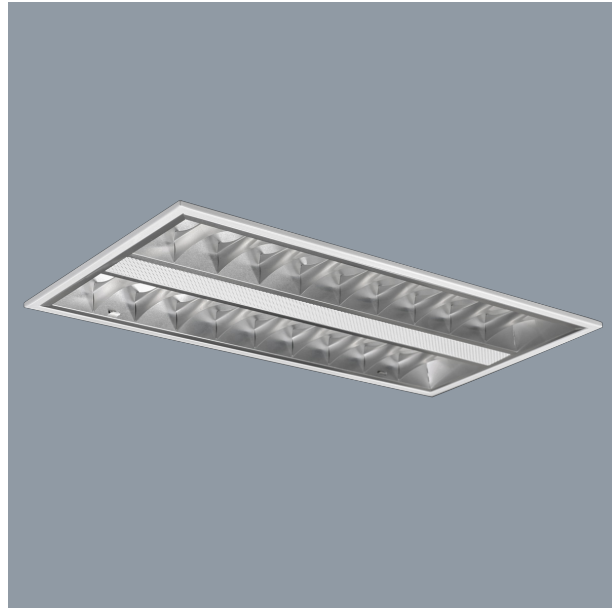

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9734/312L/CW	LED LVD. TROFFER 295x1195mm 4K	240	38	3500	4000	80

Technical Specification


Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9734/312L/CW	100	WHITE	1195(L) x 295(W) x 65(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

S9734 312 (1195 X 295 X 65mm)

S9734/312L

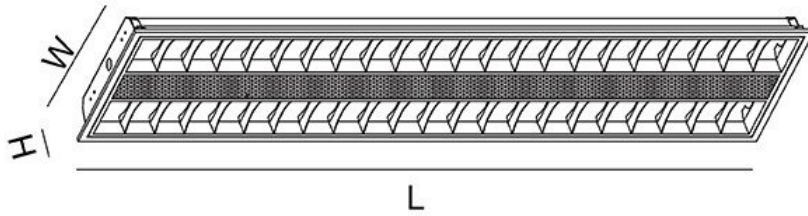

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9734/312L/CW at 4000K

