



L-LINE S9724 18/27 W


LED T8 louvre troffer

Application

Budget linear louver profile for commercial interior spaces

Design Specifications

- Pressed steel base
- Quality powder coated finish
- Double parabolic matt aluminium louvre
- LED T8 tubes fitted
- Safety fuse installed
- Flex and plug fitted, ready for plug and play

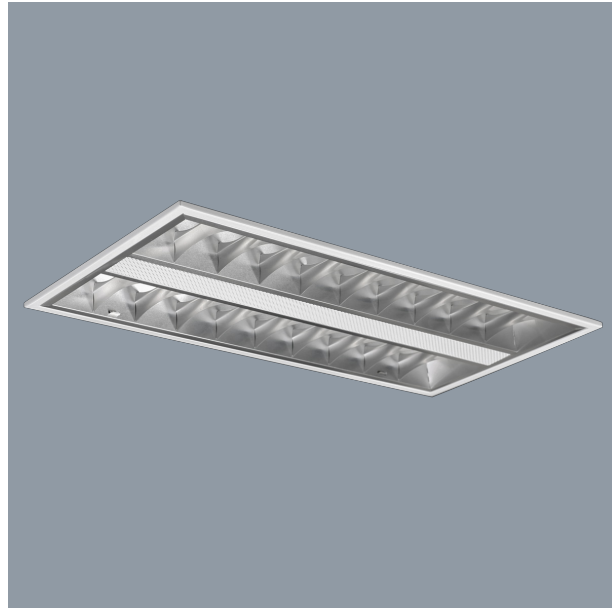

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9724/306WW	LED LOUVERED TROFFER 595 X 295 x 85	240	18	1100	3000	80
S9724/306CW	LED LOUVERED TROFFER 595 X 295 x 85	240	18	1100	4000	80
S9724/306DL	LED LOUVERED TROFFER 595 X 295 x 85	240	18	1100	6000	80
S9724/312WW	LED LOUVERED TROFFER 1195 X 295 x 85	240	36	2200	3000	80
S9724/312CW	LED LOUVERED TROFFER 1195 X 295 x 85	240	36	2200	4000	80
S9724/312DL	LED LOUVERED TROFFER 1195 X 295 x 85	240	36	2200	6000	80
S9724/606WW	LED LOUVERED TROFFER 595 X 595 x 85	240	27	1800	3000	80
S9724/606CW	LED LOUVERED TROFFER 595 X 595 x 85	240	27	1800	4000	80
S9724/606DL	LED LOUVERED TROFFER 595 X 595 x 85	240	27	1800	6000	80

Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9724/306WW	120	WHITE	595(L) x 295(W) x 85(H)
S9724/306CW	120	WHITE	595(L) x 295(W) x 85(H)
S9724/306DL	120	WHITE	595(L) x 295(W) x 85(H)
S9724/312WW	120	WHITE	1195(L) x 295(W) x 85(H)
S9724/312CW	120	WHITE	1195(L) x 295(W) x 85(H)
S9724/312DL	120	WHITE	1195(L) x 295(W) x 85(H)
S9724/606WW	120	WHITE	595(L) x 595(W) x 85(H)
S9724/606CW	120	WHITE	595(L) x 595(W) x 85(H)
S9724/606DL	120	WHITE	595(L) x 595(W) x 85(H)


Installation types - Standard metric T-Bar ceiling recessed installation Air Slot models to suit -/306, -/312 panel sizes, Plaster ceiling recessed installation (S9704 Plaster ceiling frame required)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9724/312CW at 4000K

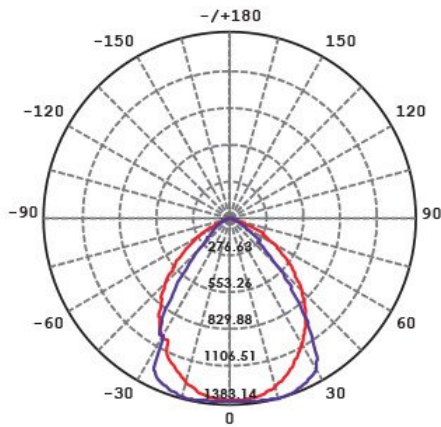

S9724/606CW at 4000K

