



## NEON SIDE BEND 24V WHITE FLN2410WW - 10W/m


Roll length 5m, maximum run length 5m, flexible Neon SIDE Bend white colour Neon, 24V, IP67, 6mm illuminated strip width

### Application

A very flexible solution for residential and commercial interior or exterior spaces

### Design Specifications

- High efficiency optics, 10W/m
- Cuttable every 50mm
- Maximum run length 5m
- Power supply ordered separately, 10W/m, 24V DC
- **Dimming options: (quick link)**  
 Type A - Trailing edge dimming,  
 Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required,  
 Type C - Analogue 1-10V  
 Type D - DALI 2 control
- Codes listed are per metre, 5M roll packs to order  
 Optional, flexible channels available (FLN0612FLEX)  
**LED channel options (quick link)** Heat sink required for system performance

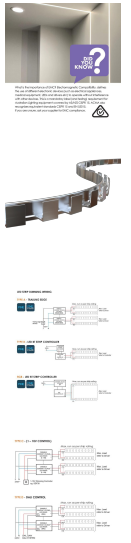



### Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Refer dimming options**



## Technical Specification

Product	Model No.	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	CRI	Lumens per metre (lm/m)
	FLN2410WW0612	24	10	120	90	280
	FLN0612FLEX					
LEDs Per Metre	Cutting Interval	CCT (K)	Dim (mm)			
140	50	3000	6(W) x 12(H) 1000(L) x 8(W) x 13.5(H)			

NOTE: for external use, protection against direct UV exposure is recommended.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".