



NEW BONDI SL7222TC

IP65 GU10 architectural wall luminaire (UP/DOWN), with GU10 selectable TC lamps included

Application

A decorative residential exterior or interior solution

Design Specifications

- Aluminium body and powder coat black or silver or anodised silver finish
- Clear tempered glass cover
- GU10 lamp base, selectable TC lamp, GU10L350TC included
- SAL lamp options GU10L550TC, GU10LR750, GU10LA750
- Up and down light distribution



Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	Diameter (mm)
SL7222GU AS	240	8	360/400/380	3000/4000/6000	50	63
SL7222TC/ BK	240	8	360/400/380	3000/4000/6000	50	63
SL7222TC/SL	240	8	360/400/380	3000/4000/6000	50	63

Technical Specification


Model No.	Dim (mm)	Body Colour
SL7222GU AS	104(W) x 187(H)	ANODISED SILVER
SL7222TC/ BK	104(W) x 187(H)	BLACK
SL7222TC/SL	104(W) x 187(H)	SILVER

Note: Optical performance (lumens lm) shown are PER LAMP

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SL7222

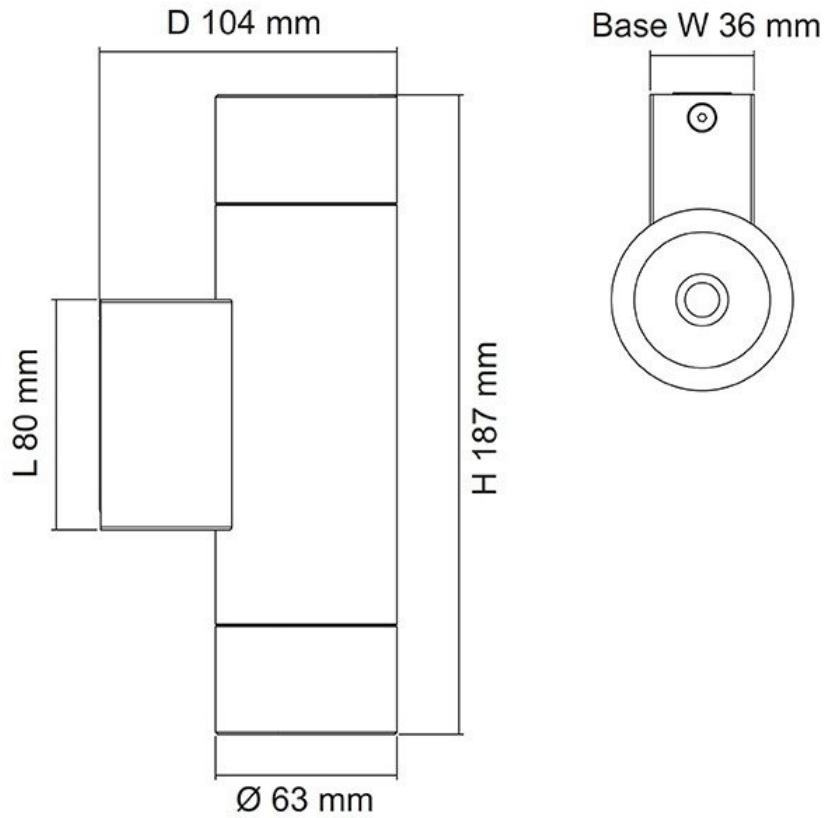

Product Images

