



OPAL LGS10 - 10W

10 watt LED SMD GLS style opal lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser, beam distribution 200 degree
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency SMD LED chips, CRI > 80
- Integral non-dimmable LED driver
- Colour temperature 3000K / 4000K / 6000K
- 1:1 size to traditional GLS lamp, suits most GLS lamp fittings, double insulation



- IP20
- tau25
- Square
- LED
- LAMP BASE E27
- LAMP BASE E27
- WIDE BEAM
- 1 YEAR COMMERCIAL WARRANTY
- 1 YEAR RESIDENTIAL WARRANTY
- WARM WHITE 3000K
- COOL WHITE 4000K
- DAYLIGHT 6000K

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
LGS10/830B22	240	10	950	3000	80	240
LGS10/840B22	240	10	1000	4000	80	240
LGS10/860B22	240	10	1050	6000	80	240
LGS10/830E27	240	10	950	3000	80	240
LGS10/840E27	240	10	1000	4000	80	240
LGS10/860E27	240	10	1050	6000	80	240




Technical Specification

Model No.	Dimmable	Diameter (mm)	Length (mm)	Base Type
LGS10/830B22	NO	60	110	B22
LGS10/840B22	NO	60	110	B22
LGS10/860B22	NO	60	110	B22
LGS10/830E27	NO	60	110	E27
LGS10/840E27	NO	60	110	E27
LGS10/860E27	NO	60	110	E27


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

LGS10 E27

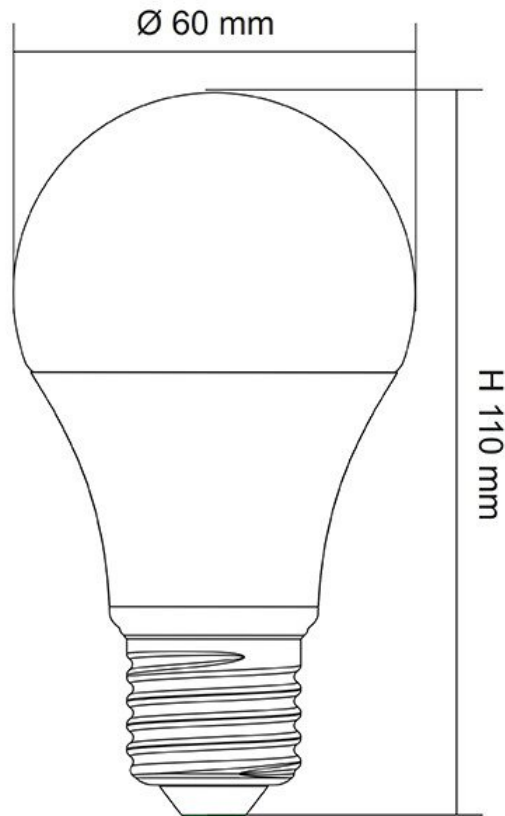

LGS10 B22

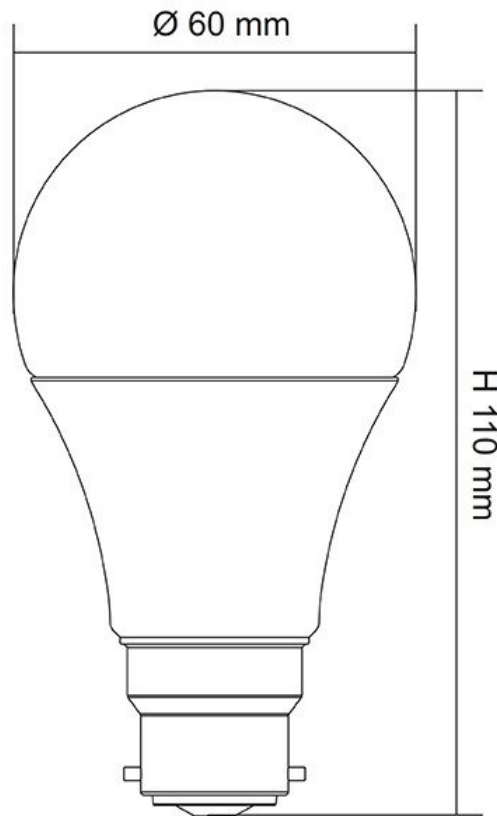

Product Images

