



PANEL (HC) S9754HC - 40/50W

40 watt LED high CRI >95, low COI <1.8

Application

Low COI <1.8 suitable for use in hospitals and medical centres to achieve compliance with AS/NZS 1680.2.5


Design Specifications

- Cyanosis Observation Index (COI <1.8) compliant with AS/NZS 1680.2.5
- Extruded aluminium profile with high efficiency opal diffuser, quality white powder coated finish
- High efficiency SMD LED chips, beam distribution 100 degree
- Remote constant current non-dimmable LED driver
- Suspended wire kits available

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **1-10V (excluding S9754HC/612CW) DALI / DSI**

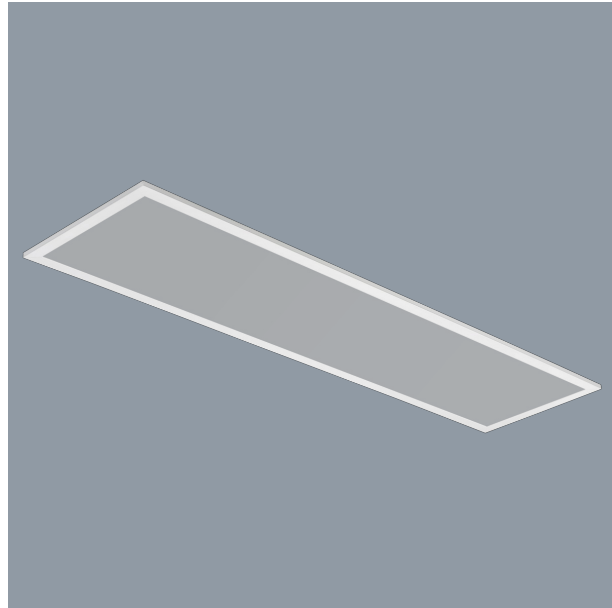

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9754HC/312CW	LED PANEL HIGH CRI 295 x 1195mm CW	240	40	2800	4000	95
S9754HC/606CW	LED PANEL HIGH CRI 595 X 595mm CW	240	40	3200	4000	95
S9754HC/612CW	LED PANEL HIGH CRI 595 x 1195mm CW	240	50	4000	4000	95

Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9754HC/312CW	100	WHITE	1195(L) x 295(W) x 12(H)
S9754HC/606CW	100	WHITE	595(L) x 595(W) x 12(H)
S9754HC/612CW	100	WHITE	1195(L) x 595(W) x 12(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9754HC/312CW at 4000K

S9754HC/606CW at 4000K

