



## PANEL MK II S9754 - 18/48W



LED panel with a choice of single colour CCT or selectable CCT

### Application

Designed for commercial and office space lighting tasks.

### Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser suitable for a range of installation types.
- White powder coated finish
- High efficiency LED optics, CRI >90
- Remote flickerCONTROLLED non-dimmable LED driver, complete with flex and plug
- Selectable CCT 3000K / 4000K / 5700K for TC models
- **Suspended wire kits available**  
Emergency models compliant to AS/NZS2293, see [SEL20PK EM Power Kit](#).

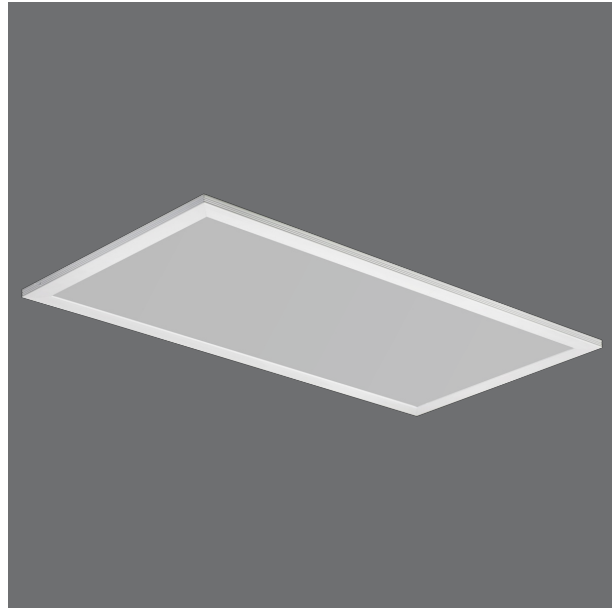









### Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V , DALI / DSI**



## Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	S9754/306TC	240	18	1900/2000/2100	3000/4000/5700	90
	S9754/606TC	240	30	3100/3200/3300	3000/4000/5700	90
	S9754/312TC	240	30	3000/3100/3200	3000/4000/5700	90
	S9754/612TC	240	48	5000/5200/5300	3000/4000/5700	90
	S9754/312CW	240	30	3100	4000	80
	S9754/312TC/DIM	240	30	3000/3100/3200	3000/4000/5700	90
	S9754/306EM	240	18			90
	S9754/312EM	240	30			90


Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)	IPART	REES	VEET
100	White	595(L) x 295(W) x 9(H)	1.2	YES	YES	YES
100	White	595(L) x 595(W) x 9(H)	2.4	YES	YES	YES
100	White	1195(L) x 295(W) x 9(H)	2.4	YES	YES	YES
100	White	1195(L) x 595(W) x 12(H)	4	YES	YES	YES
100	White	1195(L) x 295(W) x 12(H)	2.8	YES	YES	YES
100	White	1195(L) x 295(W) x 12(H)	2.4			
100	White	595(L) x 295(W) x 12(H)	1.2	N/A	N/A	N/A
100	White	1195(L) x 295(W) x 12(H)	2.4	N/A	N/A	N/A

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Photometric Data

Unit: cd C0/C180 — C90/C270 —

**S9754/312TC at 4000K**



**S9754/606TC at 5700K**

