



## PARKES S914XTC - 8 / 11W


8 or 11 watt dimmable LED downlight with tilt function, UGR<19, selectable CCT and CRI>90

### Application

Ideal for any retail, residential or commercial interior space

### Design Specifications

- Stylish white trim and recessed black profile
- Choice of 8 watt (72mm cut-out) or 11 watt (92mm cut-out)
- Remote, dimmable flickerCONTROLLED control gear
- Selectable CCT 3000 / 4000 /5000K
- High performance optics UGR<19, CRI>90, optical tilt 20°, beam distribution 36°.
- IC-4 rated, electrical class II

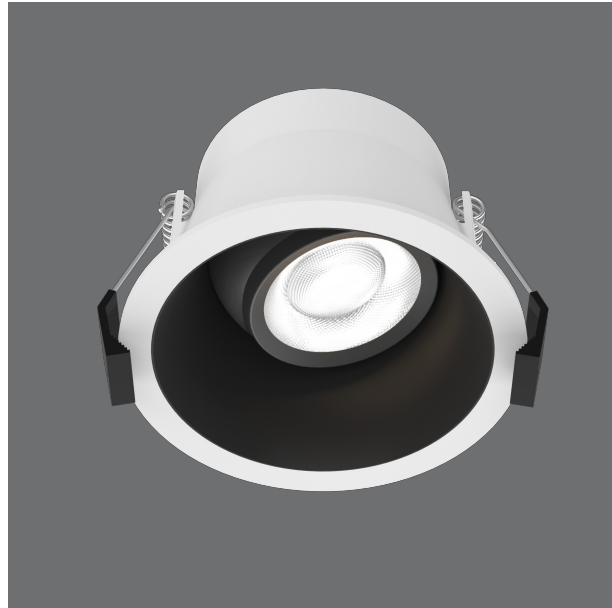



### Performance

- Dimmable - **YES**
- Dimmer Type - **trailing edge**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9142TC/WH	240	8	560/670/660	3000/4000/5700	36
	S9143TC/WH	240	11	750/870/830	3000/4000/5700	36




Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	90	WHITE	72	84	56(H)
YES	90	WHITE	92	104	71(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

S9142TC/WH

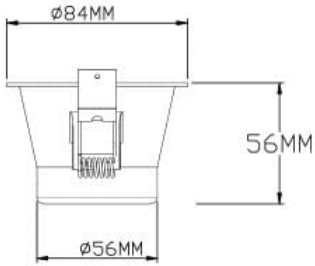

S9143TC/WH

