



PILLAR SE7188 - 20/62W

IP65 LED architectural circular profile surface mount downlight

Application

A decorative residential exterior or interior solution

Design Specifications

- Surface mounted downlight with concealed screw fixings, standard colour black
- Clear tempered glass cover
- High efficiency COB LED chips, standard CCT 4000K, optional 3000K and 5000K
- Changeable high performance multi-reflector system, standard beam distribution 30 degree.
- Integral constant current non-dimmable LED driver, 20, 28, 34, 38 and 62 watt models
- Optional beam distribution SE7188/80 - 10°, 20°, 40°, 50°, SE7188/110 - 10°, 20°, 40°, 70°, SE7188/150 - 12°, 20°, 40°, 70°



Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SE7188/80/20CW	240	20	2000	4000	80	30
SE7188/110/25CW	240	20	2500	4000	80	30
SE7188/110/34CW	240	28	3400	4000	80	30
SE7188/150/42CW	240	34	4200	4000	80	30
SE7188/150/49CW	240	38	4900	4000	80	30
SE7188/150/62CW	240	62	6200	4000	80	30

Model No.	Diameter (mm)	Dim (mm)	Body Colour
SE7188/80/20CW	80	80(W) x 136(H)	Black
SE7188/110/25CW	110	110(W) x 160(H)	Black
SE7188/110/34CW	110	110(W) x 160(H)	Black
SE7188/150/42CW	150	150(W) x 185(H)	Black
SE7188/150/49CW	150	150(W) x 185(H)	Black
SE7188/150/62CW	150	150(W) x 185(H)	Black


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions


SE7188 80

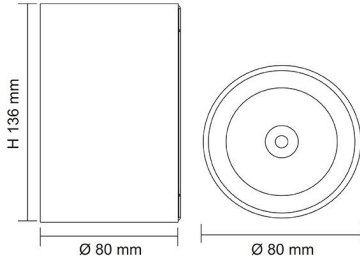

SE7188 110

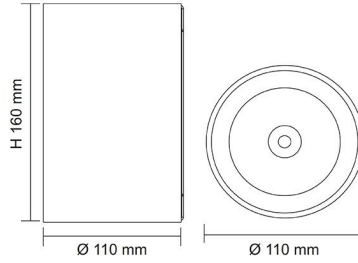


SE7188 150

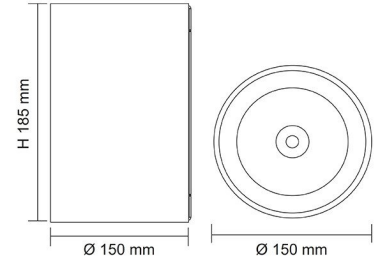


Photometric Data

Unit: cd C0/C180 — C90/C270

SE7188/80/20CW at 4000K



SE7188/110/34CW at 4000K





Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

**For more
information
please
scan me**

