


CONSTANT VOLTAGE LED DRIVER

PLUTO, PLUTO EGL


- Independent compact design
- Captured terminal screws
- Safe no load operation
- Overload protection
- Short circuit protection
- Overheating protection
- SELV and EMC compliant
- 1.2 m flex & 3 pin plug fitted (PLUTO 30, PLUTO 100, PLUTO 200)

WIRING DIAGRAM

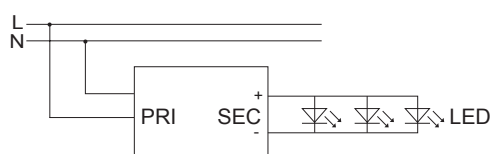


DIMENSIONS


PLUTO EGL

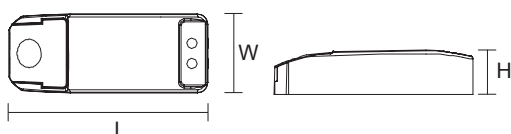


PLUTO 50

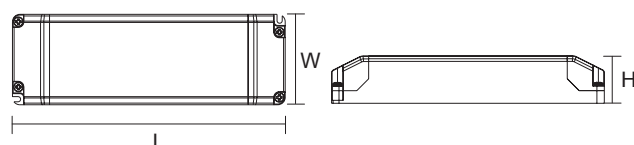

PLUTO 30, PLUTO 100, PLUTO 200

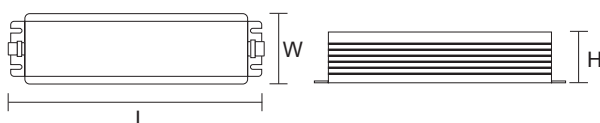

PLUTO EGL

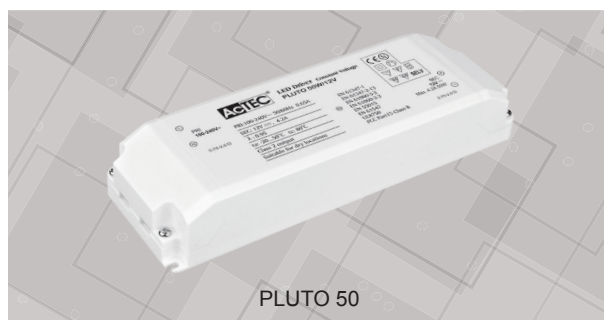

PLUTO 50



PLUTO 30, PLUTO 100, PLUTO 200

Model No.	Input	Power	Output	Power Factor	Dimensions L x W x H	IP Rating
PLUTO EGL 12V/6W	240V	6W	12V	0.6	81 x 40 x 22 mm	IP20
PLUTO EGL 12V/15W	240V	15W	12V	0.8	113 x 44 x 28 mm	IP20
PLUTO 15/24V	240V	15W	24V	0.8	113 x 44 x 28 mm	IP20
PLUTO 50/12V	240V	50W	12V	0.95	184 x 61 x 32 mm	IP20
PLUTO 50/24V	240V	50W	24V	0.95	184 x 61 x 32 mm	IP20
PLUTO 30/12V	240V	30W	12V	0.95	169 x 55 x 30 mm	IP67
PLUTO 30/24V	240V	30W	24V	0.95	169 x 55 x 30 mm	IP67
PLUTO 100/12V	240V	100W	12V	0.95	192 x 70 x 40 mm	IP67
PLUTO 100/24V	240V	100W	24V	0.95	192 x 70 x 40 mm	IP67
PLUTO 200/12V	240V	200W	12V	0.95	249 x 70 x 40 mm	IP67
PLUTO 200/24V	240V	200W	24V	0.95	249 x 70 x 40 mm	IP67