


DOWNLIGHT FITTING ASSEMBLED WITH LED MODULES

S9006, S9007, S9008 UNIFIT



DIMENSIONS

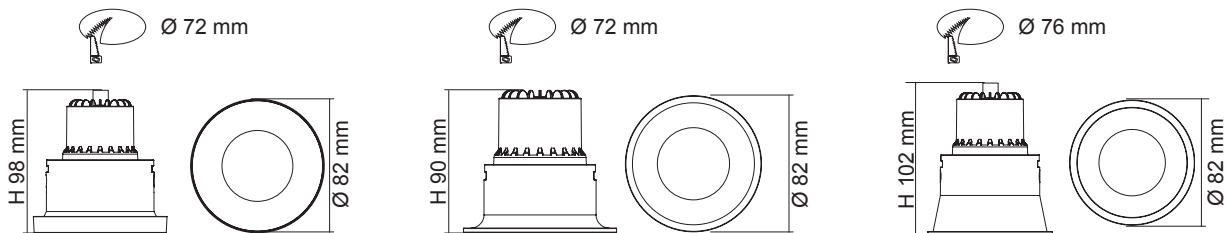

CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- High output COB LED chip
- Changeable multi-reflector system
- Polycarbonate optical lens
- Constant current trailing edge dimmable LED driver fitted
- 1.2 m flex & 2 pin plug fitted

IP RATING

- IP20 suitable for interior use only

DIMMING OPTIONS

- 1-10V analogue
- DALI / DSI, digital

BEAM ANGLE

- 60° (standard)
- 25° reflector (option)
- 40° reflector (option)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
S9006WW	240V	9W	700lm	3000K	60°	>80	Yes*	Matt White
S9006CW	240V	9W	800lm	4000K	60°	>80	Yes*	Matt White
S9006DL	240V	9W	800lm	6000K	60°	>80	Yes*	Matt White
S9007WW	240V	9W	700lm	3000K	60°	>80	Yes*	Matt White
S9007CW	240V	9W	800lm	4000K	60°	>80	Yes*	Matt White
S9007DL	240V	9W	800lm	6000K	60°	>80	Yes*	Matt White
S9008WW	240V	9W	700lm	3000K	60°	>80	Yes*	Matt White
S9008CW	240V	9W	800lm	4000K	60°	>80	Yes*	Matt White
S9008DL	240V	9W	800lm	6000K	60°	>80	Yes*	Matt White

*Trailing edge dimming



Specifications above are for reference only and may vary without prior notice