

SURFACE MOUNTED LED SQUARE DOWNLIGHT

S9015 DICE

CONSTRUCTION

- Surface mounted architectural square profile downlight
- Die-cast aluminium body
- High output COB LED chip
- Changeable multi-reflector system
- Polycarbonate optical lens
- Built-in constant current trailing edge dimmable LED driver (excluding S9015/80GU10)

IP RATING

- IP20 suitable for interior use only

FITTING COLOUR


- Black (standard)
- Matt white (option)

BEAM ANGLE


- 60° optical reflector (standard)
- 25° optical reflector (option)
- 40° optical reflector (option)

LAMP OPTIONS (S9015/80GU10)

- GU10L350 (lamp not included)
- GU10L550 (lamp not included)

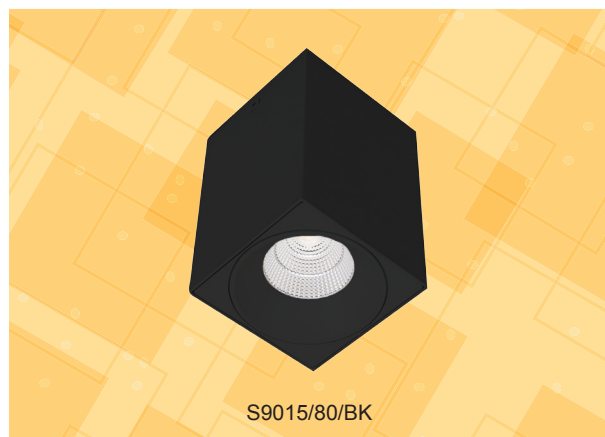

DIMENSIONS

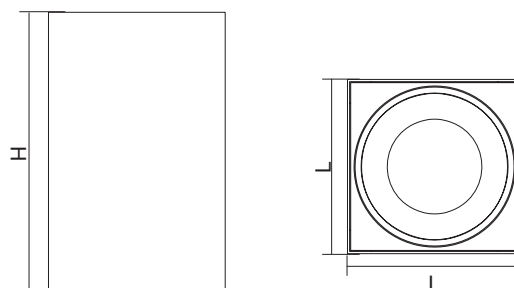

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x H
S9015/80WW/BK	240V	9W	700lm	3000K	60°	>80	Black	80 x 122 mm
S9015/80CW/BK	240V	9W	800lm	4000K	60°	>80	Black	80 x 122 mm
S9015/80DL/BK	240V	9W	800lm	6000K	60°	>80	Black	80 x 122 mm
S9015/80GU10/BK*	240V	Refer to GU10 lamp page for details					Black	80 x 122 mm
S9015/150WW/BK	240V	15W	1500lm	3000K	60°	>80	Black	150 x 247 mm
S9015/150CW/BK	240V	15W	1500lm	4000K	60°	>80	Black	150 x 247 mm
S9015/150DL/BK	240V	15W	1500lm	6000K	60°	>80	Black	150 x 247 mm

* Lamp not included

PHOTOMETRIC DATA UNIT: cd C0/C180 _____ C90/C270 _____

