


SURFACE MOUNTED DIMMABLE LED DOWNLIGHT

S9016, S9016/2, S9016/3 DICE II



DIMENSIONS

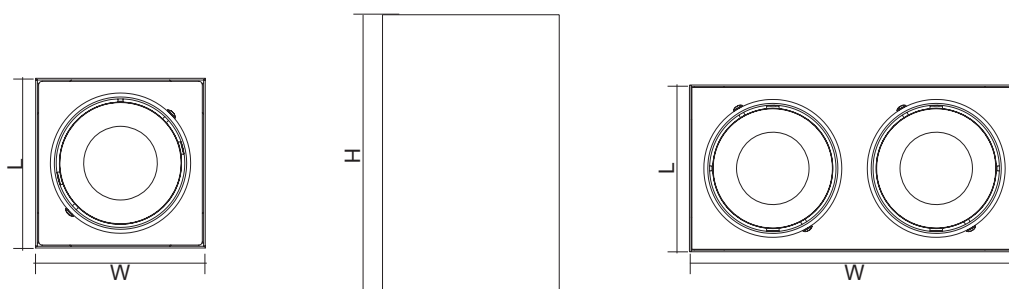

CONSTRUCTION

- Surface mounted architectural rectangular profile downlight
- Centre tilt at each head
- Die-cast aluminium body
- High output COB LED chip
- Changeable multi-reflector system
- Polycarbonate optical lens
- Built-in constant current trailing edge dimmable LED driver

IP RATING

- IP20 suitable for interior use only

FITTING COLOUR


- Black (standard)
- Matt white (option)

BEAM ANGLE

- 60° optical reflector (standard)
- 25° optical reflector (option)
- 40° optical reflector (option)





DIMENSIONS

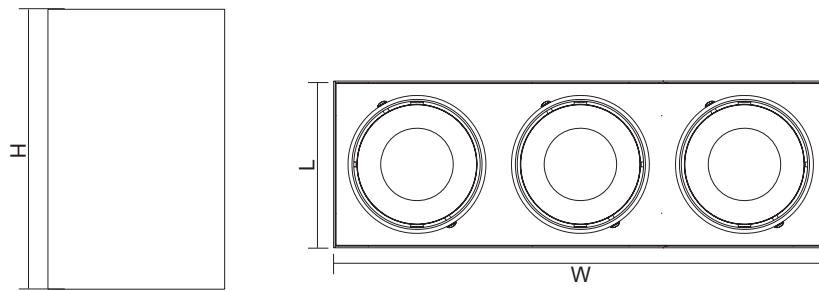

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W x H
S9016WW/BK	240V	9W	700lm	3000K	60°	>80	Black	100 x 100 x 125 mm
S9016CW/BK	240V	9W	800lm	4000K	60°	>80	Black	100 x 100 x 125 mm
S9016DL/BK	240V	9W	800lm	6000K	60°	>80	Black	100 x 100 x 125 mm
S9016/2WW/BK	240V	2 x 9W	2 x 700lm	3000K	60°	>80	Black	100 x 198 x 125 mm
S9016/2CW/BK	240V	2 x 9W	2 x 800lm	4000K	60°	>80	Black	100 x 198 x 125 mm
S9016/2DL/BK	240V	2 x 9W	2 x 800lm	6000K	60°	>80	Black	100 x 198 x 125 mm
S9016/3WW/BK	240V	3 x 9W	3 x 700lm	3000K	60°	>80	Black	100 x 296 x 125 mm
S9016/3CW/BK	240V	3 x 9W	3 x 800lm	4000K	60°	>80	Black	100 x 296 x 125 mm
S9016/3DL/BK	240V	3 x 9W	3 x 800lm	6000K	60°	>80	Black	100 x 296 x 125 mm

PHOTOMETRIC DATA UNIT: cd C0/C180 — C90/C270 —

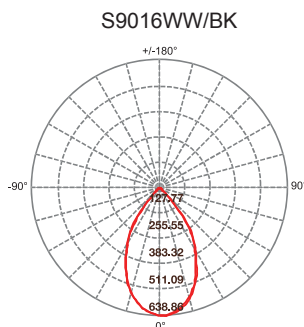

Dimmer/Switch
Compatible



www.sal.net.au